





GRATING PRODUCTS

PROGrid® and PROGrate®

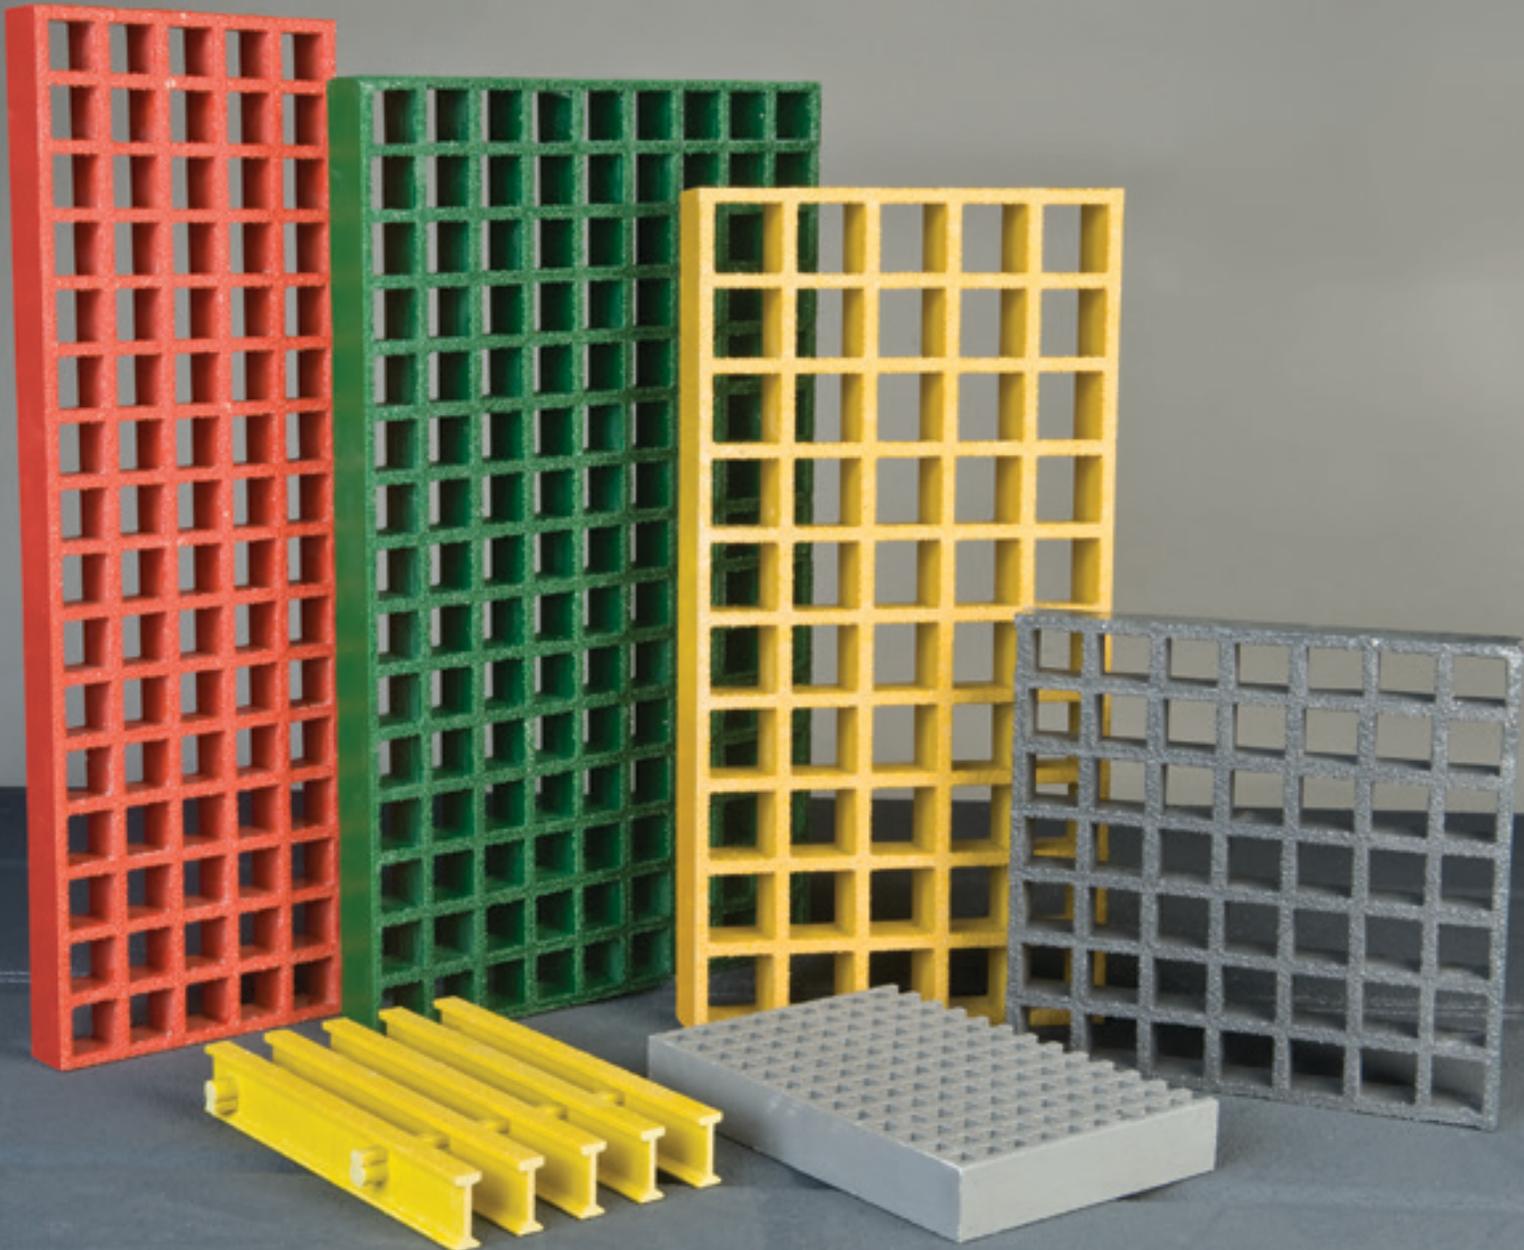



CONTENTS

GRATING PRODUCTS


- 4 PROGrid® Molded Grating
- 10 PROGrid® High Load Capacity Molded Grating
- 12 PROGrate® Pultruded Grating
- 23 PROGrate® Heavy Duty Pultruded Grating
- 30 VGBA & Food Grade Products
- 31 PROGrid® Molded & PROGrate® Pultruded Phenolic Grating

ACCESSORIES

- 33 PROGrid® Molded & PROGrate® Pultruded Stair Treads/Stair Tread Covers
- 34 PROForms® Composite Embedment Angle
- 35 Fasteners
- 36 Grating Pedestals

REFERENCE

- 37 Product Availability
- 39 Chemical Resistance Guide

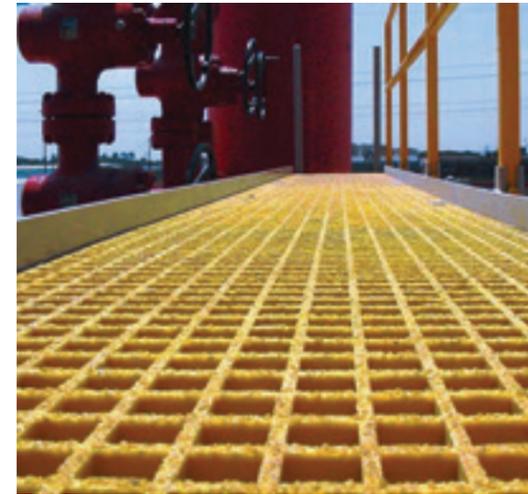

APPLICATIONS

- Floor systems
- Walkways
- Work platforms
- Stairs
- Ramps
- Trench covers
- Catwalks

FEATURES

- Corrosion resistant
- Slip-resistant gritted top surface
- Strong yet lightweight
- Low coefficient of expansion and contraction

BENEFITS

- Reduced maintenance and replacement costs
- Enhanced workplace safety
- Reduced installation costs
- Dimensionally stable in many environments

STRONG, LIGHTWEIGHT AND CORROSION-RESISTANT

Want the strength of steel without the weight? Our fiberglass-reinforced polymer (FRP) grating products have the advantage. Our grating is corrosion-resistant, it's fire-retardant, and it has low conductivity. It's available with anti-slip coating for worker safety. And it's easy to install with standard tools.

Whether you need simple grating panels or a complete FRP system with handrails, stairs and platforms, we have the solution to match. In addition to our products, we offer design, engineering and fabrication capabilities to meet your project needs.



PROGrid® Molded Grating

Proven corrosion resistance is just one of the benefits of our PROGrid® molded grating. It's strong, lightweight and performs reliably for years, even in extreme conditions. Top surface options also provide excellent slip resistance for worker safety.

Long Service Life
The high resin-to-glass ratio (approximately 65% resin to 35% glass by weight) provides excellent service life, even in the most demanding applications.

Less Waste
Interwoven square mesh construction provides bi-directional strength, so you can cut grating to fit and make the most efficient use of each panel.

Standard Resin Systems

PROGrid® molded grating is available in three standard resin systems, each providing different levels of corrosion protection. All three resin systems meet Class 1 Flame Spread Rating per ASTM E-84 test standards.

GP: A general-purpose orthophthalic polyester resin system that offers good corrosion resistance at an economical price. Standard colors: Green, Yellow, Dark Gray and Light Gray

IFR: A premium-grade isophthalic polyester resin system that provides excellent corrosion protection. Standard colors: Green, Yellow, Dark Gray and Light Gray


VFR: A vinyl ester resin system that provides the highest level of corrosion protection. Standard colors: Orange and Dark Gray

Available Top Surfaces


PROGrid® grating is available in square or rectangular mesh patterns with either Meniscus or Grit-Top slip-resistant top surfaces.

Grit-Top: quartz grit anti-slip surface

Meniscus: concave, half-moon cross section with no grit

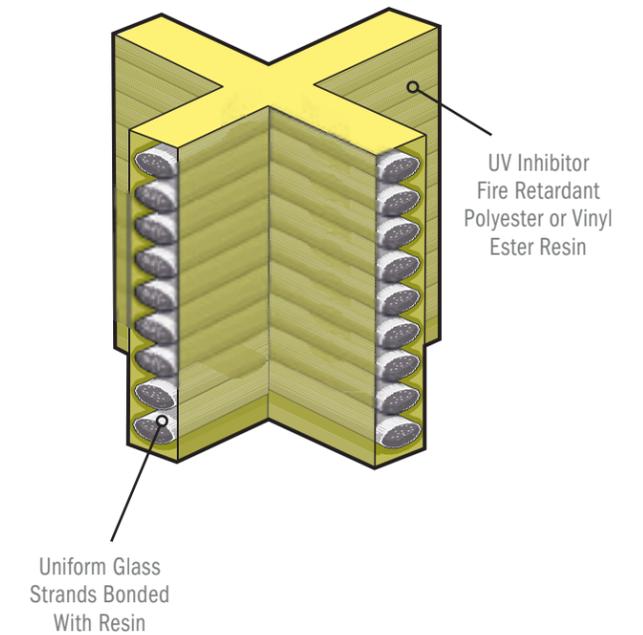


Standard Grid Dimensions




1" thick, 1.5" x 1.5" Square Grid

Bearing bars 0.25" thick
Open area of 69%




1.5" thick, 1.5" x 1.5" Square Grid

Bearing bars 0.25" thick
Open area of 69%




2" thick, 2" x 2" Square Grid

Bearing bars 0.3125" thick
Open area of 71%

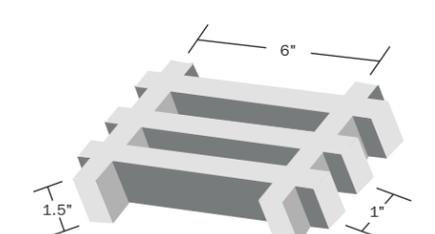

1.5" thick, 1" x 6" Rectangular Grid

Bearing bars 0.6" thick
Open area of 38%

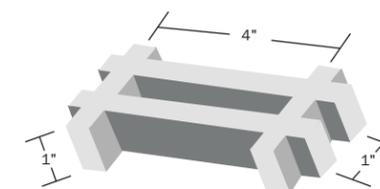

1" thick, 1" x 4" Rectangular Grid


Bearing bars 0.25" thick
Open area of 68%

Standard Panel Sizes			
1" x 1" x 4"	12' wide x 4' long	1.5" x 1.5" x 1.5"	3' wide x 10' long
1.5" x 1" x 6"	4' wide x 12' long		4' wide x 8' long
1" x 1.5" x 1.5"	3' wide x 10' long		4' wide x 12' long
	4' wide x 12' long		5' wide x 10' long
		2" x 2" x 2"	4' wide x 12' long




PROGrid® Molded Grating Load and Deflection Data

CONCENTRATED LOAD

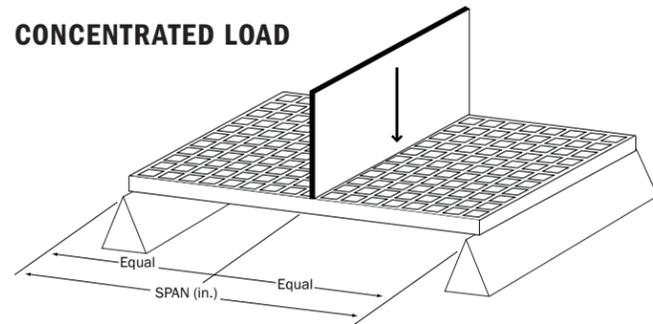


UNIFORM LOAD

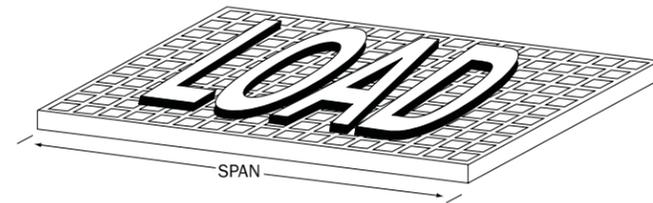

1. The following tables were developed in accordance with the test method developed by the Fiberglass Grating Manufacturers Council (FGMC) of the American Composites Manufacturers Association (ACMA) for the Fiberglass Grating Standard.
2. The designer should not exceed MAXIMUM RECOMMENDED load at any time. MAXIMUM LOAD represents a 4:1 factor of safety on ULTIMATE CAPACITY. ULTIMATE CAPACITY represents MAX LOAD observed at initial fracture.
3. Walking loads for maintenance traffic are typically a live load of 50 PSF. Deflections for worker comfort are typically limited to 0.375" (3/8") or SPAN divided by 120 under full live load. For a firmer feel under full live load or a line load 250 lbs/ft of width, limit deflections to 0.25" (1/4") or SPAN divided by 200.
4. The loads represented are for STATIC LOAD CONDITIONS at ambient temperature. Deflections for impact loads or dynamic loads will MULTIPLY the deflections shown by 2. Long term loads will result in added deflection due to creep in the material and will require higher factors of safety to ensure acceptable performance.
5. Deflections are limited to 0.5" (1/2") as recommended by the Fiberglass Grating Manufacturers Council of the American Composites Manufacturers Association.

1" x 1" x 4" Rectangular Grid 1" Thick 68% Open


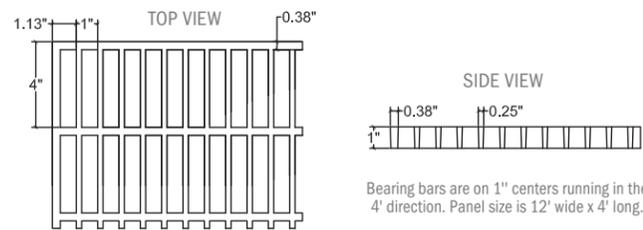


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.004	0.008	0.012	0.016	0.020	0.040	0.079	0.159	1834	0.45
18	0.012	0.024	0.036	0.049	0.061	0.122	0.243	0.486	1419	0.50
24	0.028	0.056	0.083	0.111	0.139	0.278	0.555		961	0.52
30	0.053	0.107	0.160	0.213	0.266	0.533			769	0.53
36	0.090	0.181	0.271	0.362	0.452				641	0.54
42	0.138	0.276	0.413	0.551	0.689				549	0.56
46	0.178	0.355							501	0.57

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.002	0.005	0.007	0.010	0.012	0.025	0.050	0.099	3668	0.45
18	0.011	0.023	0.034	0.046	0.057	0.114	0.228	0.456	1892	0.50
24	0.035	0.069	0.104	0.139	0.174	0.347	0.694		961	0.52
30	0.083	0.167	0.250	0.333	0.416				615	0.53
36	0.170	0.339	0.509	0.679					427	0.54
42	0.301	0.603							314	0.56
46	0.430								287	0.57

Properties Per Foot of Width			# of Bars	Load Bar Width	Bar Centers	Weight/sq ft
A = 2.69 in ²	I = 0.22 in ⁴	S = 0.45 in ³	12	0.25"	1"	2.61

0.5" x 1.5" x 1.5" Square Grid 0.5" Thick 72% Open

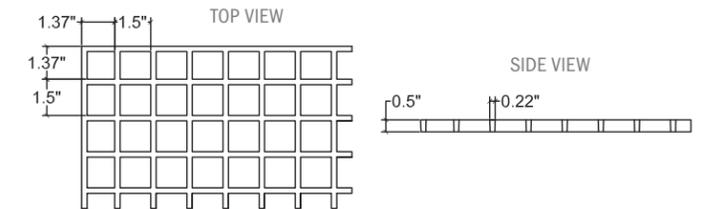


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.041	0.083	0.124	0.166	0.207	0.415			282	0.043
18	0.128	0.256	0.384	0.512	0.640				188	0.047
24	0.286	0.572							141	0.05

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.026	0.052	0.078	0.104	0.130	0.259	0.518		361	0.043
18	0.120	0.240	0.360	0.480					160	0.047
24	0.357								90	0.05

Properties Per Foot of Width			# of Bars	Load Bar Width	Bar Centers	Weight/sq ft
A = 0.84 in ²	I = 0.02 in ⁴	S = 0.07 in ³	8	.22" (7/32")	1.5"	1.33

0.5" x 2" x 2" Square Grid 0.5" Thick 78% Open


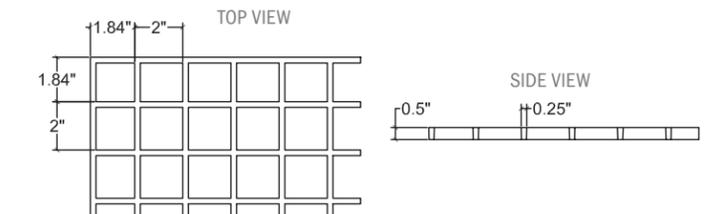


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.050	0.101	0.151	0.202	0.252	0.505			236	0.036
18	0.151	0.302	0.453	0.604					158	0.04
24	0.329	0.658							118	0.044

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.032	0.063	0.095	0.126	0.158	0.315	0.631		302	0.036
18	0.142	0.283	0.425	0.566					134	0.04
24	0.41								75	0.044

Properties Per Foot of Width			# of Bars	Load Bar Width	Bar Centers	Weight/sq ft
A = 0.66 in ²	I = 0.014 in ⁴	S = 0.054 in ³	6	0.25"	2"	1.01

1" x 1.5" x 1.5" Square Grid 1" Thick 69% Open

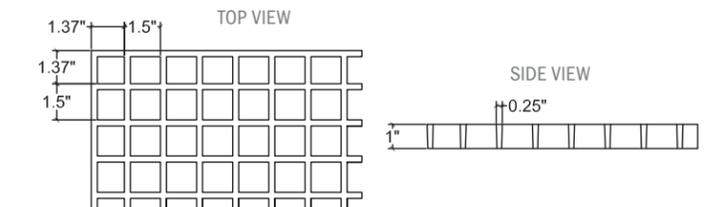


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.006	0.011	0.017	0.023	0.029	0.057	0.114	0.229	1189	0.31
18	0.018	0.035	0.053	0.071	0.089	0.177	0.355		934	0.34
24	0.040	0.080	0.120	0.160	0.199	0.399			668	0.36
30	0.076	0.152	0.228	0.304	0.380				534	0.37
36	0.128	0.256	0.384	0.512	0.640				360	0.38

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.004	0.007	0.011	0.014	0.018	0.036	0.071	0.143	2378	0.31
18	0.017	0.033	0.050	0.066	0.083	0.166	0.332	0.665	1245	0.34
24	0.050	0.100	0.150	0.199	0.249	0.498			668	0.36
30	0.119	0.237	0.356	0.475	0.593				427	0.37
36	0.240	0.480							240	0.38
42	0.431								205	0.39

Properties Per Foot of Width			# of Bars	Load Bar Width	Bar Centers	Weight/sq ft
A = 1.79 in ²	I = 0.15 in ⁴	S = 0.30 in ³	8	0.25"	1.5"	2.5



1.5" x 1.5" x 1.5"
Square Grid
1.5" Thick
68% Open

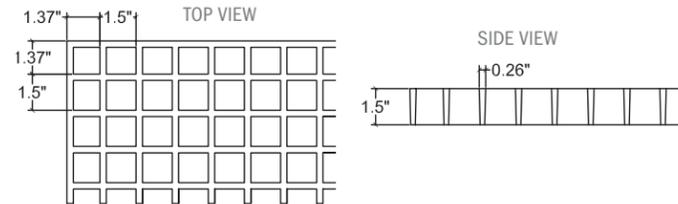


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.002	0.005	0.007	0.009	0.011	0.023	0.045	0.090	2041	0.80
18	0.005	0.011	0.016	0.022	0.027	0.055	0.109	0.219	1360	1.11
24	0.012	0.023	0.035	0.046	0.058	0.115	0.230	0.461	1021	1.25
30	0.021	0.043	0.064	0.086	0.107	0.214	0.428		816	1.31
36	0.036	0.072	0.108	0.144	0.180	0.360			680	1.35
42	0.056	0.113	0.169	0.225	0.282	0.563			583	1.37
48	0.084	0.167	0.251	0.334	0.418				510	1.38
54	0.119	0.238	0.357	0.476	0.594				453	1.38

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.003	0.004	0.006	0.007	0.014	0.028	0.057	4082	0.80
18	0.005	0.010	0.015	0.021	0.026	0.051	0.103	0.205	1813	1.11
24	0.014	0.029	0.043	0.058	0.072	0.144	0.288	0.576	1021	1.25
30	0.033	0.067	0.100	0.134	0.167	0.334	0.668		653	1.31
36	0.067	0.135	0.202	0.270	0.337	0.674			453	1.35
42	0.123	0.246	0.370	0.493	0.616				333	1.37
48	0.209	0.417	0.626						255	1.38
54	0.334	0.669							201	1.38

Properties Per Foot of Width	# of Bars	Load Bar Width	Bar Centers	Weight/sq ft
A = 2.73 in ² I = 0.49 in ⁴ S = 0.65 in ³	8	0.25"	1.5"	3.94

1.5" x 1" x 6"
Rectangular Grid
1.5" Thick
38% Open

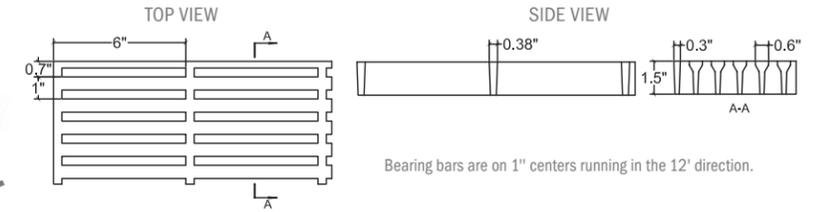


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.003	0.004	0.005	0.006	0.013	0.025	0.050	4209	1.43
18	0.003	0.007	0.010	0.013	0.017	0.033	0.066	0.133	2810	1.83
24	0.006	0.013	0.019	0.026	0.032	0.065	0.130	0.260	2105	2.22
30	0.012	0.023	0.035	0.047	0.058	0.116	0.233	0.466	1684	2.42
36	0.020	0.039	0.059	0.078	0.098	0.196	0.391		1403	2.48
42	0.030	0.061	0.091	0.121	0.151	0.303	0.605		1203	2.55
48	0.045	0.089	0.134	0.178	0.223	0.446			1052	2.58
54	0.063	0.125	0.188	0.251	0.313	0.627			935	2.62
60	0.085	0.171	0.256	0.342	0.427				842	2.63

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	0.002	0.002	0.003	0.004	0.008	0.016	0.031	6623	1.43
18	0.003	0.006	0.009	0.012	0.016	0.031	0.062	0.124	3747	1.83
24	0.008	0.016	0.024	0.032	0.041	0.081	0.162	0.325	2105	2.22
30	0.018	0.036	0.055	0.073	0.091	0.182	0.364		1347	2.42
36	0.037	0.073	0.110	0.147	0.183	0.367			935	2.48
42	0.066	0.132	0.199	0.265	0.331	0.662			687	2.55
48	0.111	0.223	0.334	0.446	0.557				526	2.58
54	0.176	0.353	0.529						416	2.62
60	0.267	0.534							337	2.63

Properties Per Foot of Width	# of Bars	Load Bar Width	Bar Centers	Weight/sq ft
A = 5.76 in ² I = 1.14 in ⁴ S _T = 1.94 in ³ S _B = 1.24 in ³	12	0.6"	1"	4.71

2" x 2" x 2"
Square Grid
2" Thick
71% Open


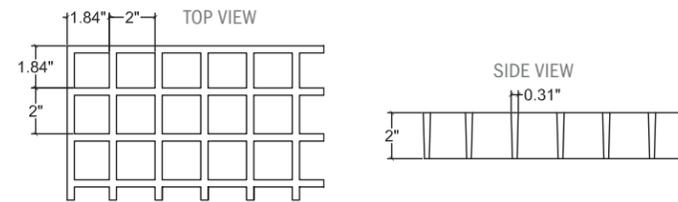


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.002	0.003	0.004	0.005	0.010	0.020	0.040	4632	1.80
18	0.003	0.006	0.009	0.011	0.014	0.029	0.057	0.114	3088	2.13
24	0.006	0.012	0.018	0.024	0.030	0.060	0.120	0.240	2316	2.40
30	0.011	0.023	0.034	0.045	0.056	0.113	0.225	0.450	1853	2.50
36	0.019	0.038	0.057	0.076	0.095	0.191	0.381		1544	2.55
42	0.030	0.059	0.089	0.118	0.148	0.296	0.591		1323	2.61
48	0.043	0.087	0.130	0.174	0.217	0.435			1158	2.65
54	0.061	0.122	0.183	0.244	0.305	0.610			1029	2.69
60	0.083	0.166	0.249	0.332	0.415				926	2.71

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	0.001	0.002	0.003	0.003	0.006	0.013	0.025	9264	1.80
18	0.003	0.005	0.008	0.011	0.013	0.027	0.053	0.107	4117	2.13
24	0.008	0.015	0.023	0.030	0.038	0.075	0.150	0.300	2316	2.40
30	0.018	0.035	0.053	0.070	0.088	0.176	0.352		1482	2.50
36	0.036	0.071	0.107	0.143	0.179	0.357			1029	2.55
42	0.065	0.129	0.194	0.259	0.323	0.647			756	2.61
48	0.109	0.217	0.326	0.435	0.543				579	2.65
54	0.171	0.343	0.514	0.686					457	2.69
60	0.259	0.519							371	2.71

Properties Per Foot of Width	# of Bars	Load Bar Width	Bar Centers	Weight/sq ft
A = 3.12 in ² I = 1.03 in ⁴ S = 1.03 in ³	6	0.31" (5/16")	2"	4.51

1.5" x 0.75" x 0.75"
Square Grid
1.5" Thick
44% Open

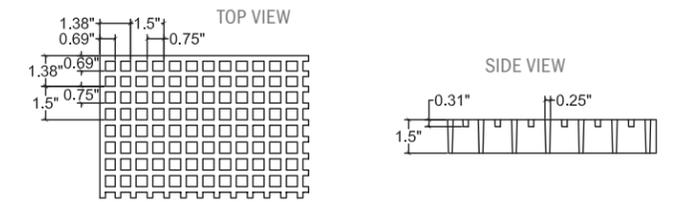


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.002	0.003	0.005	0.006	0.008	0.016	0.032	0.063	3090	1.14
18	0.004	0.009	0.013	0.017	0.021	0.043	0.085	0.170	2060	1.43
24	0.009	0.018	0.026	0.035	0.044	0.088	0.176	0.352	1545	1.64
30	0.016	0.032	0.048	0.064	0.080	0.160	0.321	0.642	1236	1.75
36	0.027	0.053	0.080	0.106	0.133	0.266	0.532		1030	1.83
42	0.041	0.083	0.124	0.165	0.207	0.413			883	1.87
48	0.060	0.121	0.181	0.242	0.302	0.605			773	1.90
54	0.085	0.170	0.255	0.339	0.424				687	1.93
60	0.116	0.232	0.347	0.463	0.579				618	1.94

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	0.002	0.003	0.004	0.005	0.010	0.020	0.039	6180	1.14
18	0.004	0.008	0.012	0.016	0.020	0.040	0.080	0.159	2747	1.43
24	0.011	0.022	0.033	0.044	0.055	0.110	0.220	0.440	1545	1.64
30	0.025	0.050	0.075	0.100	0.125	0.251	0.502		989	1.75
36	0.050	0.100	0.149	0.199	0.249	0.498			687	1.83
42	0.090	0.181	0.271	0.362	0.452				505	1.87
48	0.151	0.302	0.454	0.605					386	1.90
54	0.239	0.477							305	1.93
60	0.362								247	1.94

Properties Per Foot of Width	# of Bars	Load Bar Width	Bar Centers	Weight/sq ft
A = 3.29 in ² I = 0.74 in ⁴ S = 0.90 in ³	8	0.25"	0.75"	4.75

1.5" x 1.5" x 6"
Rectangular Grid
1.5" Thick
55% Open

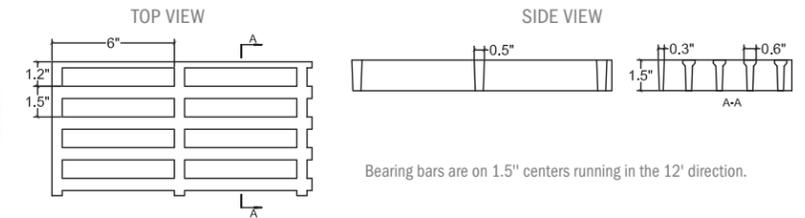

Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.003	0.004	0.005	0.006	0.013	0.026	0.051	3601	1.40
18	0.003	0.007	0.010	0.014	0.017	0.035	0.069	0.139	2401	1.75
24	0.007	0.014	0.022	0.029	0.036	0.072	0.144	0.288	1800	2.00
30	0.013	0.025	0.038	0.050	0.063	0.126	0.251	0.502	1440	2.24
36	0.021	0.042	0.062	0.083	0.104	0.208	0.415		1200	2.34
42	0.032	0.065	0.097	0.130	0.162	0.324	0.649		1029	2.38
48	0.048	0.095	0.143	0.190	0.238	0.476			900	2.42
54	0.067	0.134	0.202	0.269	0.336	0.672			800	2.44
60	0.091	0.183	0.274	0.366	0.457				720	2.46

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	0.002	0.002	0.003	0.004	0.008	0.016	0.032	7202	1.40
18</										



PROGrid® High Load Capacity Molded Grating (HLC)



PROGrid® High Load Capacity (HLC) molded grating is high-strength, corrosion-resistant and low-maintenance – just like our PROGrid® molded grating products. Plus, it's engineered to carry higher loads than traditional grating. Our molded HLC grating is available in 4' x 6' panels with 1.5" and 2" thicknesses and comes in GPFR, IFR and VFR resin systems in standard gray.

Standard Resin Systems

PROGrid® HLC molded grating is available in three standard resin systems, each providing different levels of corrosion protection. All three resin systems meet Class 1 Flame Spread Rating per ASTM E-84 test standards.

GPFR: A general-purpose orthophthalic polyester resin system that offers good corrosion resistance at an economical price.

IFR: A premium-grade isophthalic polyester resin system that provides excellent corrosion protection.


VFR: A vinyl ester resin system that provides the highest level of corrosion protection.

APPLICATIONS

- Flooring, platforms and ramps
- Storage areas
- Assembly lines
- Long-span walkways
- Trench covers with vehicular traffic

FEATURES

- High strength
- Corrosion resistant
- Low conductivity
- Fire retardant
- Low maintenance



NOTE: Load carrying bars are oriented to run in the 6' dimension of the panel. Panels furnished with closed bars all sides.

Allowable Spans for Vehicular Loads

	Wheel Load (lb) (1/2 Axle Load + 30% Impact)	Load Distribution		Allowable Span in Inches	
		Parallel to Axle ¹	Perpendicular to Axle ¹	1.5" Deep HLC Molded Grating	2" Deep HLC Molded Grating
AASHTO Standard Truck⁴ 32,000 lb Axle Load - Dual Wheels (**formerly AASHTO H-20)	20,800	20" + 4"	8"	1'-2"	1'-5"
Automobile Traffic 5,000 lb Vehicle - 1,500 lb Load 55% Drive Axle Load	2,220	8" + 4"	8"	2'-2"	2'-8"
5 Ton Capacity Forklift 14,400 lb Vehicle - 24,400 lb Total Load 85% Drive Axle Load	13,480	11" + 4"	11"	1'1"	1'-5"
3 Ton Capacity Forklift 9,800 lb Vehicle - 15,800 lb Total Load 85% Drive Axle Load	8,730	7" + 4"	7"	1'0"	1'-4"
1 Ton Capacity Forklift 4,200 lb Vehicle - 6,200 lb Total Load 85% Drive Axle Load	3,425	4" + 4"	4"	1'7"	2'-1"


Allowable Spans for Vehicular Loads NOTES:

1. Load is carried by the grating load bars immediate under wheel + four additional load bars adjacent to wheel.
2. Allowable Span is based on a 0.25" maximum deflection and a Factor of Safety of 3.0. Other criteria may be required by certain construction codes. Check code requirements to determine design criteria.
3. ALLOWABLE SPAN IS STRONGLY DEPENDENT ON WHEEL WIDTH AND VEHICLE WEIGHT/LOAD CAPACITY. If your application varies from the values given on this table, contact us for application assistance.
4. Load based on the AASHTO Standard Truck Load as defined in AASHTO LRFD Bridge Design Specifications, 2nd Ed. This does not imply that the allowable span meets the deflection requirements of this specification.




PROGrid® High Load Capacity Molded Grating Load and Deflection Data

CONCENTRATED LOAD

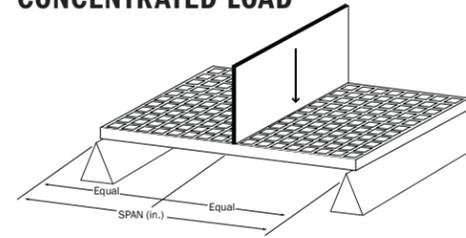


UNIFORM LOAD

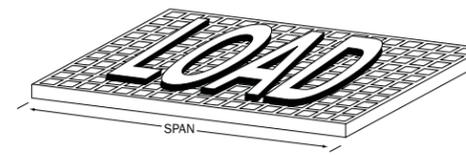

1. These tables were developed in accordance with the test method developed by the Fiberglass Grating Manufacturers Council (FGMC) of the American Composites Manufacturers Association (ACMA) for the Fiberglass Grating Standard.
2. The designer should not exceed MAXIMUM RECOMMENDED load at any time. MAXIMUM LOAD represents a 4:1 factor of safety on ULTIMATE CAPACITY. ULTIMATE CAPACITY represents MAX LOAD observed at initial fracture.
3. Walking loads for maintenance traffic are typically a live load of 50 PSF. Deflections for worker comfort are typically limited to 0.375" (3/8") or SPAN divided by 120 under full live load. For a firmer feel under full live load or a line load 250 lbs/ft of width, limit deflections to 0.25" (1/4") or SPAN divided by 200.
4. The loads represented are for STATIC LOAD CONDITIONS at ambient temperature. Deflections for impact loads or dynamic loads will MULTIPLY the deflections shown by 2. Long term loads will result in added deflection due to creep in the material and will require higher factors of safety to ensure acceptable performance.
5. Deflections are limited to 0.5" (1/2") as recommended by the Fiberglass Grating Manufacturers Council of the American Composites Manufacturers Association.

1.5" x 1" x 2" HLC Rectangular Grid 1.5" Thick 48% Open

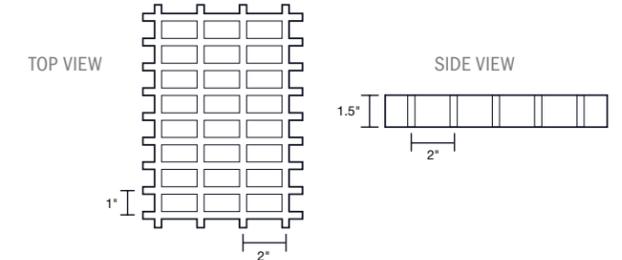


Span (inches)	CONCENTRATED LOAD in lbs/ft of width							Max Load
	200	500	1000	2000	3000	4000	5000	
18	<0.01	0.02	0.04	0.07	0.11	0.15	0.19	28,047
24	0.02	0.04	0.09	0.17	0.26	0.34	0.44	20,430
36	0.06	0.14	0.28					13,620
42	0.09	0.22	0.44					11,619

Span (inches)	UNIFORM LOAD in lbs/ft ²							Max Load
	200	400	500	600	700	800		
18	<0.01	0.01	0.02	0.02	0.02	0.03	0.03	36,000
24	0.02	0.04	0.05	0.06	0.08	0.09	0.09	20,390
36	0.10	0.21	0.26	0.31	0.37	0.42	0.42	8,814
42	0.19	0.39	0.48					6,550

Properties Per Foot of Width	# of Bars	Load Bar Width	Bar Centers	Weight/sq ft
A=7.2 in ² I=1.35 in ⁴ S=1.75	12	T-.43 / B-.35	1"	6.21



2" x 1" x 2" HLC Rectangular Grid 2" Thick 48% Open

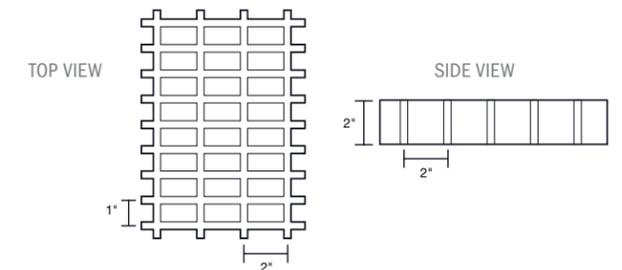

Span (inches)	CONCENTRATED LOAD in lbs/ft of width							Max Load
	200	500	1000	2000	3000	4000	5000	
18	<0.01	0.01	0.03	0.05	0.07	0.10	0.13	32,651
24	0.02	0.03	0.06	0.11	0.17	0.22	0.27	27,245
36	0.04	0.09	0.17	0.34	0.51			18,130
42	0.05	0.13	0.26					15,525

Span (inches)	UNIFORM LOAD in lbs/ft ²							Max Load
	200	400	500	600	700	800		
18	<0.01	0.01	0.01	0.01	0.01	0.01	0.01	43,494
24	0.01	0.02	0.03	0.04	0.04	0.05	0.05	27,195
36	0.06	0.12	0.15	0.18	0.21	0.24	0.24	8,795
42	0.11	0.22	0.28	0.33	0.39	0.44	0.44	8,795

Properties Per Foot of Width	# of Bars	Load Bar Width	Bar Centers	Weight/sq ft
A=7.2 in ² I=1.35 in ⁴ S=1.75	12	T-.47 / B-.35	1"	8.4

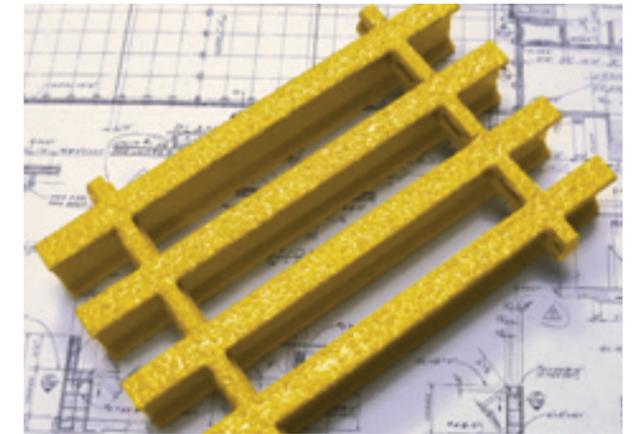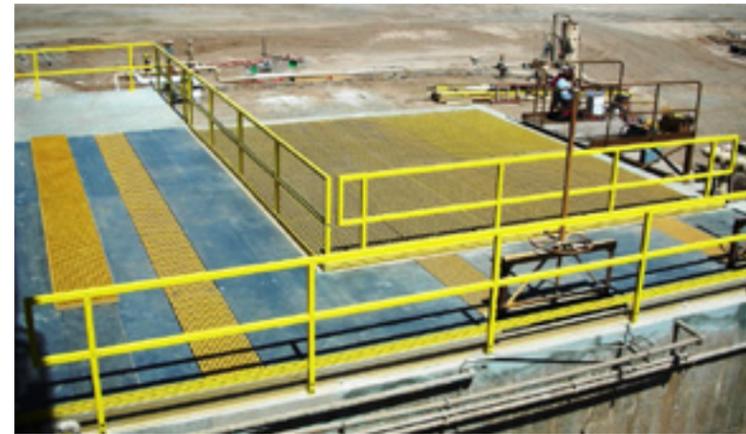

Standard Resin Systems


PROGrate® pultruded grating is available in two standard resin systems, each providing different levels of corrosion protection. Both resin systems meet Class 1 Flame Spread Rating per ASTM E-84 test standards.

IFR: A premium-grade isophthalic polyester resin system that provides excellent corrosion protection. Standard colors: Yellow and Gray.

VFR: A vinyl ester resin system that provides the highest level of corrosion protection. Standard colors: Yellow and Gray.

APPLICATIONS

- Floor systems
- Walkways
- Work platforms
- Stairs
- Ramps
- Trench covers
- Catwalks

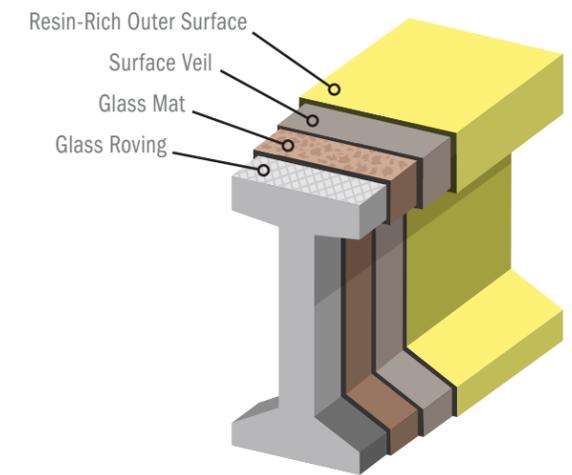

PROGrate® Pultruded Grating

PROGrate® pultruded grating supports heavier loads and longer spans than comparably sized molded grating. It's ideal for demanding applications ranging from ADA-compliant walkways to heavy-duty vehicular traffic.

Strong, Lightweight and Corrosion-Resistant

Our pultruded grating has the strength of steel, but it won't corrode like steel can.

Safer Walking Surface

A coarse epoxy coating enhances traction.

Support and Stability

Cross-rods and bearing bars lock mechanically for maximum unidirectional strength.

Easy Fabrication

Panels are lightweight, easy to transport, and can be cut and fabricated using standard hand tools.

Extended Life

The coated resin surface increases resistance to chemical corrosion and continuous UV exposure.


VGBA Certified

Our pultruded FRP grating has been tested and has met the specifications set forth by the Virginia Graeme Baker Act (VGBA) for use in VGBA compliant drain systems.

Stress Resistance

Continuous glass rovings resist tension, compression and bending while providing longitudinal strength. Continuous glass mat increases transverse strength and resistance to impact.

Standard Dimensions

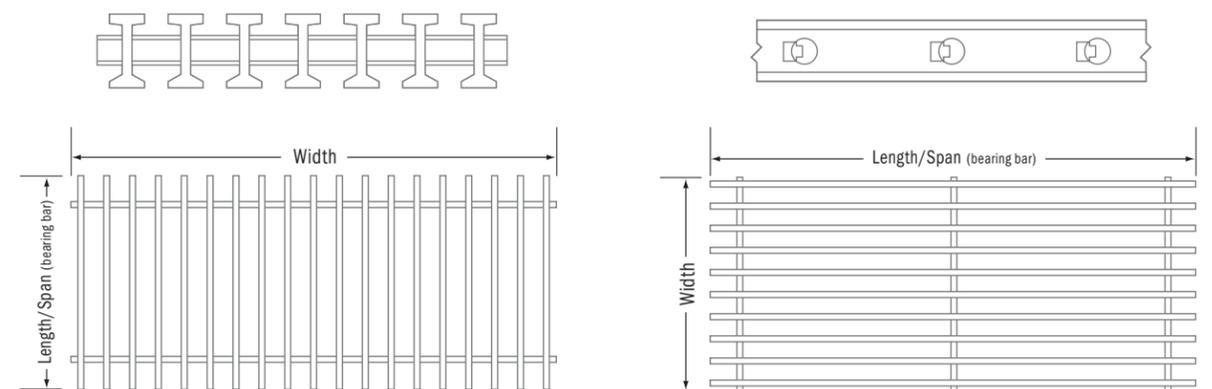


Standard Panel Sizes	
3' wide x 20' long	4' wide x 20' long




PROGrate® Pultruded Grating Load and Deflection Data

CONCENTRATED LOAD

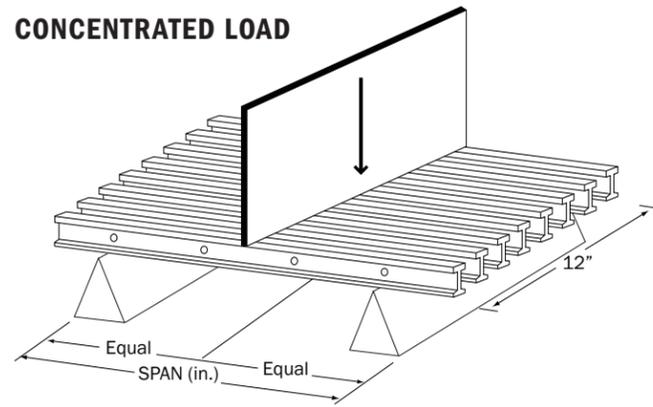


UNIFORM LOAD

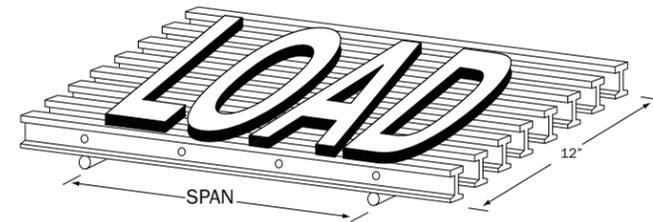

1. These tables were developed in accordance with the test method developed by the Fiberglass Grating Manufacturers Council (FGMC) of the American Composites Manufacturers Association (ACMA) for the Fiberglass Grating Standard.
2. The designer should not exceed MAXIMUM RECOMMENDED load at any time. MAXIMUM LOAD represents a 2:1 factor of safety on ULTIMATE CAPACITY. ULTIMATE CAPACITY represents MAX LOAD observed at initial fracture.
3. Walking loads for maintenance traffic are typically a live load of 50 PSF. Deflections for worker comfort are typically limited to 0.375" (3/8") or SPAN divided by 120 under full live load. For a firmer feel under full live load or a line load 250 lbs/ft of width, limit deflections to 0.25" (1/4") or SPAN divided by 200.
4. The loads represented are for STATIC LOAD CONDITIONS at ambient temperature. Deflections for impact loads or dynamic loads will MULTIPLY the deflections shown by 2. Long term loads will result in added deflection due to creep in the material and will require higher factors of safety to ensure acceptable performance.
5. Deflections are limited to 0.5" (1/2") as recommended by the Fiberglass Grating Manufacturers Council of the American Composites Manufacturers Association.

T 10-18 T Bearing Bar 1" Thick 18% Open




Span (inches)	CONCENTRATED LOAD in lbs/ft of width									Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000			
12	0.002	0.004	0.006	0.008	0.009	0.019	0.038	0.075	5112	0.96	
18	0.005	0.010	0.015	0.020	0.025	0.050	0.100	0.199	3408	1.22	
24	0.011	0.022	0.033	0.044	0.055	0.109	0.218	0.436	2556	1.32	
30	0.021	0.041	0.062	0.083	0.103	0.207	0.414		2045	1.36	
36	0.035	0.070	0.106	0.141	0.176	0.352			1704	1.38	
42	0.055	0.110	0.165	0.221	0.276	0.551			1461	1.40	
48	0.081	0.162	0.243	0.325	0.406				1278	1.42	

Span (inches)	UNIFORM LOAD in lbs/ft ²									Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000			
12	0.001	0.002	0.004	0.005	0.006	0.012	0.023	0.047	10418	0.96	
18	0.005	0.009	0.014	0.019	0.023	0.047	0.093	0.187	4562	1.22	
24	0.014	0.027	0.041	0.055	0.068	0.136	0.273	0.545	2582	1.32	
30	0.032	0.065	0.097	0.129	0.162	0.323	0.646		1626	1.36	
36	0.066	0.132	0.198	0.264	0.330	0.660			1137	1.38	
42	0.121	0.241	0.362	0.482	0.603				835	1.40	
48	0.203	0.406	0.608						638	1.42	

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 2.86 in ² I = 0.37 in ⁴ S _T = 1.00 in ³ S _B = 0.59 in ³	6	1"	2"	2.39

T 10-33 T Bearing Bar 1" Thick 33% Open




Span (inches)	CONCENTRATED LOAD in lbs/ft of width									Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000			
12	0.003	0.005	0.008	0.010	0.013	0.026	0.051	0.103	1950	0.70	
18	0.007	0.014	0.020	0.027	0.034	0.068	0.135	0.270	1300	0.90	
24	0.015	0.029	0.044	0.058	0.073	0.145	0.291	0.582	975	0.99	
30	0.028	0.055	0.083	0.110	0.138	0.276	0.551		780	1.02	
36	0.047	0.093	0.140	0.187	0.234	0.467			650	1.04	
42	0.074	0.147	0.221	0.294	0.368				557	1.05	
48	0.109	0.217	0.326	0.435	0.543				488	1.06	

Span (inches)	UNIFORM LOAD in lbs/ft ²									Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000			
12	0.002	0.003	0.005	0.006	0.008	0.016	0.032	0.064	7599	0.70	
18	0.006	0.013	0.019	0.025	0.032	0.063	0.127	0.253	3314	0.90	
24	0.018	0.036	0.055	0.073	0.091	0.182	0.364		1957	0.99	
30	0.043	0.086	0.129	0.172	0.215	0.431			1258	1.02	
36	0.088	0.175	0.263	0.350	0.438				883	1.04	
42	0.161	0.322	0.482	0.643					655	1.05	
48	0.272	0.543							502	1.06	

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 2.34 in ² I = 0.27 in ⁴ S _T = 0.78 in ³ S _B = 0.42 in ³	8	1"	1.5"	2.25

T 10-35 T Bearing Bar 1" Thick 35% Open




Span (inches)	CONCENTRATED LOAD in lbs/ft of width									Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000			
12	0.002	0.005	0.007	0.010	0.012	0.024	0.049	0.097	3759	0.74	
18	0.006	0.013	0.019	0.026	0.032	0.064	0.128	0.256	2506	0.95	
24	0.013	0.027	0.040	0.053	0.067	0.133	0.267	0.533	1880	1.08	
30	0.025	0.049	0.074	0.099	0.123	0.247	0.493		1504	1.14	
36	0.042	0.084	0.126	0.168	0.209	0.419			1253	1.16	
42	0.065	0.131	0.196	0.262	0.327	0.654			1074	1.18	
48	0.096	0.192	0.288	0.384	0.480				940	1.20	

Span (inches)	UNIFORM LOAD in lbs/ft ²									Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000			
12	0.002	0.003	0.004	0.006	0.007	0.015	0.030	0.060	7620	0.74	
18	0.006	0.012	0.017	0.023	0.029	0.059	0.119	0.239	3339	0.95	
24	0.017	0.033	0.049	0.066	0.083	0.166	0.333	0.666	1898	1.08	
30	0.039	0.077	0.115	0.154	0.019	0.385			1204	1.14	
36	0.079	0.157	0.235	0.314	0.392				835	1.16	
42	0.143	0.286	0.429	0.572					614	1.18	
48	0.240	0.480							470	1.20	

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 2.38 in ² I = 0.31 in ⁴ S _T = 0.84 in ³ S _B = 0.49 in ³	5	1"	2.5"	2.00

T 10-50 T Bearing Bar 1" Thick 50% Open





Span (inches)	CONCENTRATED LOAD in lbs/ft of width									Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000			
12	0.003	0.007	0.010	0.014	0.017	0.034	0.068	0.136	1476	0.53	
18	0.009	0.018	0.028	0.037	0.046	0.092	0.184	0.368	984	0.66	
24	0.019	0.039	0.058	0.078	0.097	0.195	0.389		738	0.74	
30	0.036	0.072	0.108	0.144	0.180	0.361			590	0.78	
36	0.062	0.123	0.185	0.246	0.308	0.615			492	0.79	
42	0.096	0.193	0.289	0.386	0.482				422	0.80	
48	0.142	0.284	0.427	0.569					369	0.81	

Span (inches)	UNIFORM LOAD in lbs/ft ²									Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000			
12	0.002	0.004	0.006	0.008	0.011	0.021	0.042	0.085	5735	0.53	
18	0.009	0.017	0.026	0.035	0.043	0.086	0.173	0.345	2952	0.66	
24	0.024	0.048	0.073	0.097	0.122	0.243	0.486		1473	0.74	
30	0.056	0.113	0.169	0.225	0.282	0.563			939	0.78	
36	0.115	0.231	0.346	0.461	0.577				661	0.79	
42	0.211	0.422	0.633						492	0.80	
48	0.356								376	0.81	

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 1.76 in ² I = 0.21 in ⁴ S _T = 0.59 in ³ S _B = 0.31 in ³	6	1"	2"	1.81





T 15-17
T Bearing Bar
 1.5" Thick
 17% Open

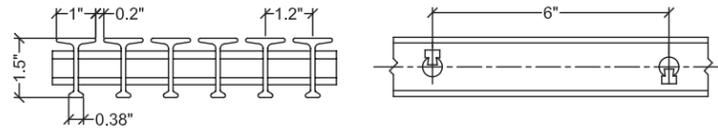

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.001	0.002	0.002	0.003	0.006	0.012	0.024	13240	1.89
18	0.002	0.004	0.006	0.008	0.010	0.021	0.042	0.084	5884	2.72
24	0.006	0.011	0.017	0.022	0.028	0.056	0.112	0.225	3310	3.2
30	0.012	0.025	0.037	0.050	0.062	0.125	0.250	0.500	2118	3.52
36	0.025	0.051	0.076	0.101	0.127	0.253	0.506		1471	3.6
42	0.047	0.093	0.140	0.187	0.233	0.466			1081	3.62
48	0.079	0.158	0.237	0.316	0.396				827	3.64
54	0.126	0.252	0.378	0.504	0.630				654	3.66
60	0.191	0.382	0.573						530	3.68
66	0.278	0.556							438	3.7

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 3.08 in ² I = 0.88 in ⁴ S _T = 1.38 in ³ S _B = 1.02 in ³	10	1.5"	1.2"	3.39

T 15-33
T Bearing Bar
 1.5" Thick
 33% Open

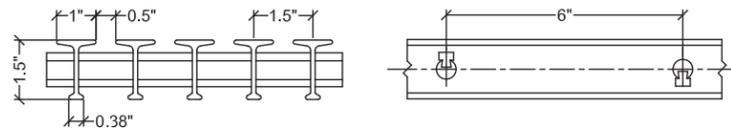



Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.002	0.003	0.004	0.005	0.011	0.021	0.042	8235	1.71
18	0.003	0.005	0.008	0.011	0.013	0.026	0.053	0.106	5490	2.3
24	0.005	0.011	0.016	0.022	0.027	0.054	0.109	0.217	4118	2.65
30	0.010	0.020	0.031	0.041	0.051	0.102	0.205	0.409	3294	2.75
36	0.017	0.035	0.052	0.070	0.087	0.174	0.348	0.697	2745	2.79
42	0.027	0.055	0.082	0.109	0.136	0.273	0.545		2353	2.83
48	0.040	0.081	0.121	0.161	0.201	0.403			2059	2.86
54	0.057	0.114	0.170	0.227	0.284	0.568			1830	2.89
60	0.077	0.155	0.232	0.309	0.387				1647	2.91
66	0.102	0.204	0.307	0.409	0.511				1497	2.93

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.001	0.002	0.003	0.003	0.007	0.013	0.026	10541	1.71
18	0.002	0.005	0.007	0.010	0.012	0.025	0.050	0.099	4685	2.3
24	0.007	0.014	0.020	0.027	0.034	0.068	0.136	0.272	2635	2.65
30	0.016	0.032	0.048	0.064	0.080	0.160	0.320	0.639	1687	2.75
36	0.033	0.065	0.098	0.131	0.163	0.327	0.653		1171	2.79
42	0.060	0.119	0.179	0.239	0.298	0.597			861	2.83
48	0.101	0.201	0.302	0.403	0.503				659	2.86
54	0.160	0.319	0.479	0.638					521	2.89
60	0.242	0.483							422	2.91
66	0.351								348	2.93

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 2.47 in ² I = 0.70 in ⁴ S _T = 1.10 in ³ S _B = 0.82 in ³	8	1.5"	1.5"	2.81

T 15-50
T Bearing Bar
 1.5" Thick
 50% Open

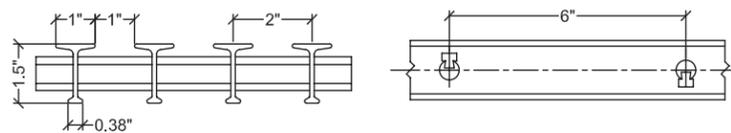


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.003	0.004	0.005	0.006	0.013	0.026	0.051	5210	1.41
18	0.003	0.007	0.010	0.013	0.017	0.033	0.066	0.132	3473	1.84
24	0.007	0.014	0.021	0.029	0.036	0.072	0.143	0.286	2605	2.01
30	0.013	0.027	0.040	0.054	0.067	0.134	0.268	0.536	2084	2.1
36	0.023	0.045	0.068	0.090	0.113	0.225	0.450		1737	2.16
42	0.035	0.070	0.104	0.139	0.174	0.348	0.695		1489	2.22
48	0.051	0.102	0.153	0.204	0.255	0.510			1303	2.26
54	0.072	0.144	0.216	0.288	0.360				1158	2.28
60	0.098	0.196	0.293	0.391	0.489				1042	2.3
66	0.129	0.258	0.387	0.516	0.645				947	2.32

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.002	0.002	0.003	0.004	0.008	0.016	0.032	6669	1.41
18	0.003	0.006	0.009	0.012	0.015	0.031	0.062	0.124	3464	1.84
24	0.009	0.018	0.027	0.036	0.045	0.089	0.179	0.357	1667	2.01
30	0.021	0.042	0.063	0.084	0.105	0.209	0.419		1067	2.1
36	0.042	0.084	0.127	0.169	0.211	0.422			741	2.16
42	0.076	0.152	0.228	0.304	0.380				545	2.22
48	0.127	0.255	0.382	0.510	0.637				417	2.26
54	0.202	0.405	0.607						329	2.28
60	0.306	0.611							267	2.3
66	0.444								220	2.32

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 1.85 in ² I = 0.53 in ⁴ S _T = 0.83 in ³ S _B = 0.61 in ³	6	1.5"	2"	2.23

T 20-33
T Bearing Bar
 2" Thick
 33% Open

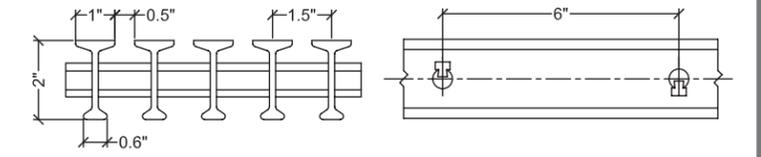


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.001	0.002	0.002	0.003	0.005	0.010	0.020	16215	3.60
18	0.001	0.002	0.003	0.004	0.005	0.010	0.020	0.040	10810	6.07
24	0.002	0.004	0.005	0.007	0.009	0.018	0.037	0.073	8108	7.89
30	0.003	0.006	0.009	0.012	0.015	0.030	0.060	0.121	6486	9.32
36	0.005	0.010	0.014	0.019	0.024	0.048	0.096	0.192	5405	10.10
42	0.007	0.015	0.022	0.029	0.036	0.073	0.146	0.291	4633	10.60
48	0.010	0.021	0.031	0.042	0.052	0.104	0.208	0.417	4054	11.06
54	0.015	0.029	0.044	0.058	0.073	0.146	0.291	0.583	3603	11.26
60	0.020	0.040	0.059	0.079	0.099	0.198	0.396		3243	11.36
66	0.026	0.052	0.078	0.105	0.131	0.261	0.523		2948	11.46
72	0.034	0.068	0.101	0.135	0.169	0.338	0.676		2703	11.50

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	0.001	0.001	0.001	0.002	0.003	0.006	0.012	20269	3.60
18	0.001	0.002	0.003	0.004	0.005	0.009	0.019	0.038	13524	6.07
24	0.002	0.005	0.007	0.009	0.011	0.023	0.046	0.091	7398	7.89
30	0.005	0.009	0.014	0.019	0.024	0.047	0.094	0.189	5437	9.32
36	0.009	0.018	0.027	0.036	0.045	0.090	0.180	0.361	3612	10.10
42	0.016	0.032	0.048	0.064	0.080	0.159	0.319	0.637	2635	10.60
48	0.026	0.052	0.078	0.104	0.130	0.260	0.521		2030	11.06
54	0.041	0.082	0.123	0.164	0.205	0.410			1600	11.26
60	0.062	0.124	0.186	0.248	0.309	0.619			1295	11.36
66	0.090	0.180	0.269	0.359	0.449				1070	11.46
72	0.127	0.254	0.380	0.507	0.634				899	11.50

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 4.34 in ² I = 2.11 in ⁴ S _T = 2.64 in ³ S _B = 1.76 in ³	8	2"	1.5"	4.44


T 20-50
T Bearing Bar
 2" Thick
 50% Open

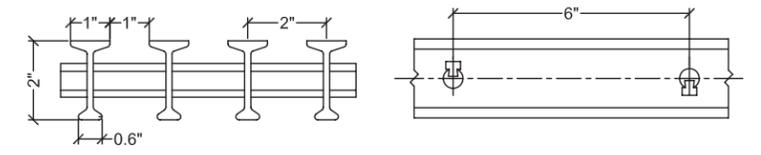

Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.002	0.003	0.004	0.005	0.010	0.020	0.040	13302	1.80
18	0.001	0.003	0.004	0.006	0.007	0.015	0.029	0.059	8868	4.15
24	0.002	0.005	0.007	0.009	0.012	0.023	0.047	0.093	6651	6.17
30	0.004	0.008	0.011	0.015	0.019	0.038	0.077	0.153	5321	7.35
36	0.006	0.012	0.018	0.024	0.031	0.061	0.122	0.245	4434	7.95
42	0.009	0.019	0.028	0.037	0.046	0.093	0.186	0.372	3801	8.31
48	0.013	0.027	0.040	0.054	0.067	0.135	0.269	0.539	3326	8.55
54	0.019	0.038	0.057	0.076	0.095	0.190	0.379		2956	8.65
60	0.026	0.051	0.077	0.103	0.129	0.257	0.514		2660	8.75
66	0.034	0.068	0.102	0.136	0.171	0.341	0.682		2419	8.78
72	0.044	0.088	0.133	0.177	0.221	0.442			2217	8.80

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in
---------------	-------------------------------------	--	--	--	--	--	--	--	----------	--



I 10-40
I Bearing Bar
1" Thick
40% Open



Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ^{^6} (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.001	0.002	0.002	0.003	0.006	0.012	0.025	17605	1.80
18	0.003	0.005	0.008	0.011	0.014	0.027	0.054	0.108	7969	2.10
24	0.008	0.016	0.024	0.032	0.039	0.079	0.158	0.316	3961	2.28
30	0.019	0.037	0.056	0.074	0.093	0.185	0.371		2574	2.37
36	0.038	0.075	0.113	0.151	0.188	0.377			1791	2.42
42	0.069	0.138	0.208	0.277	0.346	0.692			1314	2.44
48	0.118	0.235	0.353	0.470	0.588				1004	2.45
54	0.188	0.376	0.564						792	2.46
60	0.285	0.569							713	2.47

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 3.66 in ² I = 0.46 in ⁴ S = 0.93 in ³	12	1"	1"	3.47

I 10-50
I Bearing Bar
1" Thick
50% Open





Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ^{^6} (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.003	0.004	0.005	0.007	0.013	0.026	0.053	7185	1.36
18	0.004	0.007	0.011	0.015	0.018	0.037	0.074	0.147	4790	1.65
24	0.008	0.015	0.023	0.031	0.038	0.077	0.154	0.306	3593	1.88
30	0.014	0.028	0.042	0.057	0.071	0.141	0.283	0.565	2874	1.99
36	0.024	0.048	0.073	0.097	0.121	0.242	0.484		2395	2.01
42	0.038	0.076	0.114	0.152	0.190	0.380			2053	2.03
48	0.056	0.112	0.169	0.225	0.281	0.562			1796	2.05
54	0.080	0.159	0.239	0.318	0.398				1597	2.06
60	0.109	0.217	0.326	0.435	0.543				1437	2.07
66	0.144	0.288	0.432	0.576					1307	2.08
72	0.186	0.372	0.558						1198	2.09

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ^{^6} (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.002	0.002	0.003	0.004	0.008	0.017	0.033	11887	1.36
18	0.003	0.007	0.010	0.014	0.017	0.035	0.069	0.138	6299	1.65
24	0.010	0.019	0.029	0.038	0.048	0.096	0.191	0.383	3621	1.88
30	0.022	0.044	0.066	0.088	0.110	0.221	0.442		2308	1.99
36	0.045	0.091	0.136	0.181	0.227	0.453			1591	2.01
42	0.083	0.166	0.249	0.333	0.416				1175	2.03
48	0.140	0.281	0.421	0.562					898	2.05
54	0.224	0.448	0.672						709	2.06
60	0.340	0.679							638	2.07

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 3.05 in ² I = 0.39 in ⁴ S = 0.77 in ³	10	1"	1.2"	2.97

I 10-60
I Bearing Bar
1" Thick
60% Open




Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ^{^6} (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.002	0.003	0.005	0.007	0.008	0.016	0.033	0.065	5755	1.10
18	0.004	0.009	0.013	0.018	0.022	0.044	0.088	0.176	3850	1.38
24	0.009	0.019	0.028	0.037	0.047	0.094	0.187	0.374	2888	1.54
30	0.017	0.035	0.052	0.069	0.086	0.173	0.345	0.690	2310	1.63
36	0.029	0.059	0.088	0.117	0.146	0.293	0.586		1925	1.66
42	0.046	0.092	0.138	0.184	0.230	0.459			1650	1.68
48	0.068	0.136	0.203	0.271	0.339	0.678			1444	1.70
54	0.095	0.191	0.286	0.381	0.477				1283	1.72
60	0.129	0.259	0.388	0.517	0.647				1155	1.74
66	0.171	0.342	0.513	0.685					1050	1.75
72	0.221	0.442	0.663						962	1.76

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ^{^6} (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.002	0.003	0.004	0.005	0.010	0.020	0.041	7944	1.10
18	0.004	0.008	0.012	0.017	0.021	0.041	0.083	0.165	5296	1.38
24	0.012	0.023	0.035	0.047	0.058	0.117	0.234	0.468	2935	1.54
30	0.027	0.054	0.081	0.108	0.135	0.270	0.539		1845	1.63
36	0.055	0.110	0.165	0.220	0.274	0.549			1281	1.66
42	0.100	0.201	0.301	0.402	0.502				943	1.68
48	0.169	0.339	0.508	0.678					721	1.70
54	0.268	0.536							571	1.72
60	0.404								514	1.74

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 2.44 in ² I = 0.31 in ⁴ S = 0.62 in ³	8	1"	1.5"	2.47

I 15-40
I Bearing Bar
1.5" Thick
40% Open




Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ^{^6} (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.001	0.002	0.002	0.003	0.006	0.012	0.024	14034	3.00
18	0.001	0.002	0.004	0.005	0.006	0.012	0.025	0.050	9356	4.88
24	0.002	0.005	0.007	0.010	0.012	0.024	0.049	0.098	7017	5.90
30	0.004	0.009	0.013	0.018	0.022	0.044	0.088	0.176	5614	6.40
36	0.007	0.015	0.022	0.029	0.036	0.073	0.146	0.292	4678	6.66
42	0.011	0.023	0.034	0.046	0.057	0.114	0.229	0.457	4010	6.75
48	0.017	0.034	0.051	0.068	0.085	0.169	0.338	0.677	3509	6.81
54	0.024	0.048	0.072	0.096	0.120	0.240	0.480		3119	6.83
60	0.033	0.066	0.099	0.131	0.164	0.328	0.657		2807	6.85
66	0.044	0.087	0.131	0.174	0.218	0.436			2552	6.87
72	0.057	0.113	0.170	0.226	0.283	0.565			2339	6.88

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ^{^6} (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	0.001	0.001	0.001	0.002	0.004	0.007	0.015	21051	3.00
18	0.001	0.002	0.004	0.005	0.006	0.012	0.023	0.047	14559	4.88
24	0.003	0.006	0.009	0.012	0.015	0.031	0.061	0.122	7136	5.90
30	0.007	0.014	0.021	0.027	0.034	0.069	0.137	0.275	4405	6.40
36	0.014	0.027	0.041	0.055	0.068	0.137	0.274	0.547	3161	6.66
42	0.025	0.050	0.075	0.100	0.125	0.250	0.500		2292	6.75
48	0.042	0.085	0.127	0.169	0.211	0.423			1746	6.81
54	0.068	0.135	0.203	0.270	0.338	0.675			1387	6.83
60	0.103	0.205	0.308	0.411	0.513				1124	6.85
66	0.150	0.300	0.450	0.599					928	6.87
72	0.212	0.424	0.636						779	6.88

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 4.66 in ² I = 1.32 in ⁴ S = 1.76 in ³	12	1.5"	1"	4.22


I 15-50
I Bearing Bar
1.5" Thick
50% Open



Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ^{^6} (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.001	0.002	0.003	0.004	0.007	0.015	0.029	11055	2.46
18	0.002	0.003	0.005	0.006	0.008	0.015	0.030	0.061	7370	4.00
24	0.003	0.006	0.009	0.012	0.015	0.030	0.060	0.119	5528	4.84
30	0.005	0.011	0.016	0.021	0.027	0.054	0.107	0.214	4422	5.25
36	0.009	0.018	0.027	0.036	0.045	0.089	0.178	0.356	3685	5.46
42	0.014	0.028	0.042	0.056	0.070	0.139	0.279	0.558	3159	5.53
48	0.021	0.041	0.062	0.083	0.103	0.206	0.413		2764	5.58
54	0.029	0.059	0.088	0.117	0.146	0.293	0.586		2457	5.60
60	0.040	0.080	0.120	0.160	0.200	0.401			2211	5.61
66	0.053	0.106	0.160	0.213	0.266	0.532			2010	5.63
72	0.069	0.138	0.207	0.276	0.345	0.689			1843	5.64

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ^{^6} (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	0.001	0.001	0.002	0.002	0.005	0.009	0.018	13992	2.46
18	0.001	0.003	0.004	0.006	0.007	0.014	0.028	0.057	9328	4.00
24	0.004	0.007	0.011	0						

I 10-40-ADA
I Bearing Bar
 1" Thick
 40% Open

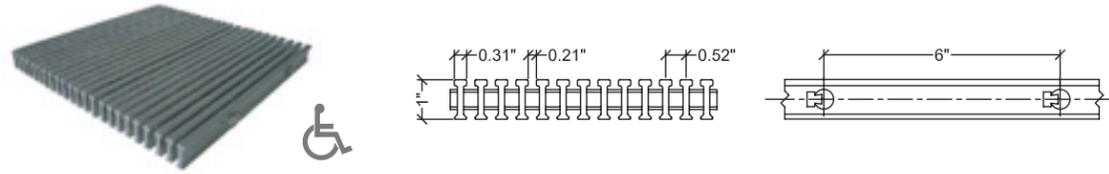


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.002	0.003	0.004	0.005	0.009	0.018	0.036	9005	1.99
18	0.003	0.006	0.009	0.011	0.014	0.029	0.057	0.115	6003	2.12
24	0.006	0.013	0.019	0.026	0.032	0.064	0.129	0.257	4503	2.24
30	0.012	0.024	0.036	0.048	0.060	0.120	0.239	0.479	3602	2.35
36	0.020	0.040	0.060	0.080	0.100	0.201	0.402		3002	2.42
42	0.032	0.063	0.095	0.126	0.158	0.315			2573	2.45
48	0.047	0.093	0.140	0.187	0.233	0.466			2251	2.47
54	0.066	0.132	0.198	0.265	0.331	0.661			2001	2.48
60	0.090	0.181	0.271	0.361	0.452				1800	2.49
66	0.120	0.240	0.359	0.479	0.599				1637	2.50
72	0.155	0.310	0.465	0.620					1500	2.51

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.001	0.002	0.002	0.003	0.006	0.011	0.023	11526	1.99
18	0.003	0.005	0.008	0.011	0.013	0.027	0.054	0.107	5123	2.12
24	0.008	0.016	0.024	0.032	0.040	0.080	0.161	0.321	2882	2.24
30	0.019	0.037	0.056	0.075	0.094	0.187	0.374		1844	2.35
36	0.038	0.075	0.113	0.151	0.188	0.377			1281	2.42
42	0.069	0.138	0.207	0.276	0.345				941	2.45
48	0.117	0.233	0.350	0.466					720	2.47
54	0.186	0.372	0.558						569	2.48
60	0.282	0.565							461	2.49
66	0.412								381	2.5
72	0.581								320	2.51

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 4.44 in ² I = 0.49 in ⁴ S = 0.98 in ³	23	1"	.52"	4.08

I 10-50-ADA
I Bearing Bar
 1" Thick
 50% Open

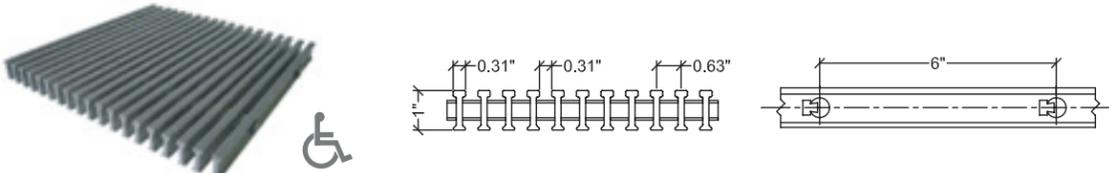


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.003	0.004	0.006	0.007	0.014	0.028	0.056	7495	1.29
18	0.003	0.007	0.010	0.014	0.017	0.035	0.069	0.139	4997	1.75
24	0.007	0.015	0.022	0.030	0.037	0.074	0.148	0.295	3748	1.95
30	0.014	0.028	0.042	0.055	0.069	0.139	0.277		2998	2.03
36	0.024	0.048	0.071	0.095	0.119	0.238	0.476		2498	2.04
42	0.037	0.075	0.112	0.150	0.187	0.375			2141	2.06
48	0.056	0.111	0.167	0.223	0.278				1874	2.07
54	0.079	0.158	0.237	0.315	0.394				1666	2.08
60	0.108	0.215	0.323	0.431	0.538				1499	2.09
66	0.143	0.285	0.428	0.570					1363	2.10
72	0.184	0.369	0.553						1250	2.11

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.002	0.003	0.003	0.004	0.009	0.017	0.035	9594	1.29
18	0.003	0.007	0.010	0.013	0.016	0.033	0.065	0.130	4264	1.75
24	0.009	0.018	0.028	0.037	0.046	0.092	0.185	0.369	2398	1.95
30	0.022	0.043	0.065	0.087	0.108	0.216	0.433		1535	2.03
36	0.045	0.089	0.134	0.179	0.223	0.447			1066	2.04
42	0.082	0.164	0.246	0.328	0.410				783	2.06
48	0.139	0.278	0.417						600	2.07
54	0.222	0.444	0.665						474	2.08
60	0.336	0.673							383	2.09
66	0.490								317	2.1
72	0.691								267	2.11

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 3.67 in ² I = 0.40 in ⁴ S = 0.80 in ³	19	1"	0.63"	3.50

I 10-60-ADA
I Bearing Bar
 1" Thick
 60% Open

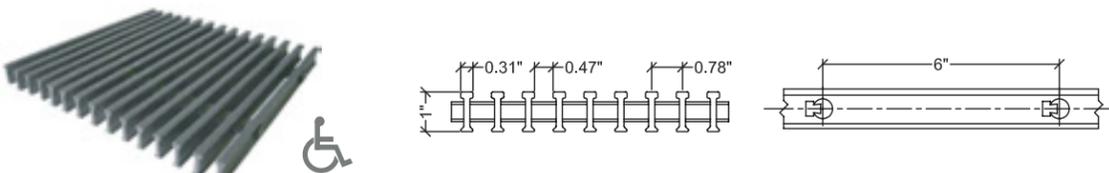


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.002	0.003	0.005	0.006	0.008	0.015	0.030	0.060	6181	1.20
18	0.004	0.008	0.012	0.016	0.021	0.041	0.082	0.164	4121	1.48
24	0.009	0.017	0.026	0.035	0.044	0.087	0.175	0.349	3091	1.65
30	0.016	0.033	0.049	0.065	0.082	0.164	0.327		2472	1.72
36	0.028	0.055	0.083	0.110	0.138	0.276			2060	1.76
42	0.043	0.086	0.129	0.172	0.214	0.429			1766	1.80
48	0.063	0.127	0.190	0.253	0.316				1545	1.82
54	0.089	0.178	0.267	0.357	0.446				1374	1.84
60	0.121	0.242	0.363	0.484	0.605				1237	1.86
66	0.160	0.320	0.480	0.641					1124	1.87
72	0.207	0.414	0.620						1030	1.88

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.002	0.003	0.004	0.005	0.009	0.019	0.038	7912	1.20
18	0.004	0.008	0.012	0.015	0.019	0.038	0.077	0.154	3516	1.48
24	0.011	0.022	0.033	0.044	0.055	0.109	0.218	0.436	1978	1.65
30	0.026	0.051	0.077	0.102	0.128	0.255			1266	1.72
36	0.052	0.104	0.155	0.207	0.259				879	1.76
42	0.094	0.188	0.281	0.375					646	1.80
48	0.158	0.316	0.475	0.633					494	1.82
54	0.251	0.501							391	1.84
60	0.378								316	1.86
66	0.551								261	1.87
72	0.776								220	1.88

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 2.90 in ² I = 0.32 in ⁴ S = 0.64 in ³	15	1"	0.78"	2.92

I 15-40-ADA
I Bearing Bar
 1.5" Thick
 40% Open

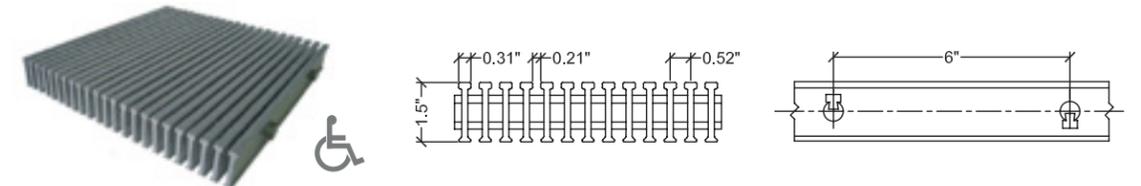


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.001	0.002	0.002	0.003	0.005	0.011	0.021	15057	3.40
18	0.001	0.002	0.003	0.004	0.006	0.011	0.022	0.045	10038	5.42
24	0.002	0.005	0.007	0.009	0.012	0.023	0.047	0.094	7528	6.16
30	0.004	0.008	0.013	0.017	0.021	0.042	0.085	0.170	6023	6.63
36	0.007	0.014	0.022	0.029	0.036	0.072	0.143	0.287	5019	6.78
42	0.011	0.022	0.034	0.045	0.056	0.112	0.224	0.447	4302	6.90
48	0.016	0.033	0.049	0.065	0.082	0.163	0.327		3764	7.05
54	0.023	0.046	0.069	0.092	0.115	0.229	0.459		3346	7.15
60	0.031	0.063	0.094	0.125	0.157	0.313			3011	7.18
66	0.042	0.083	0.125	0.166	0.208	0.416			2738	7.20
72	0.054	0.108	0.162	0.215	0.269	0.539			2509	7.22

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.000	0.001	0.001	0.001	0.002	0.003	0.007	0.013	19273	3.40
18	0.001	0.002	0.003	0.004	0.005	0.011	0.021	0.042	8566	5.42
24	0.003	0.006	0.009	0.012	0.015	0.029	0.058	0.117	4818	6.16
30	0.007	0.013	0.020	0.027	0.033	0.066	0.133	0.265	3084	6.63
36	0.013	0.027	0.040	0.054	0.067	0.134	0.269		2141	6.78
42	0.024	0.049	0.073	0.098	0.122	0.245			1573	6.9
48	0.041	0.082	0.123	0.163	0.204				1205	7.05
54	0.065	0.129	0.194	0.258	0.323				952	7.15
60	0.098	0.196	0.294	0.392	0.490				771	7.18
66	0.143	0.286	0.429						637	7.2
72	0.202	0.404							535	7.22


Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 6.24 in ² I = 1.38 in ⁴ S = 1.84 in ³	23	1.5"	0.52"	5.32

I 15-50-ADA
I Bearing Bar
 1.5" Thick
 50% Open

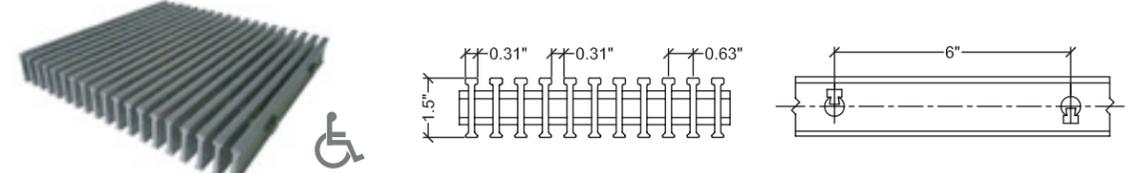

Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.001	0.002	0.002	0.003	0.006	0.011	0.022	12052	3.26
18	0.001	0.003	0.004	0.006	0.007	0.014	0.028	0.056	8035	4.3

I 30-40-ADA
I Bearing Bar
 3" Thick
 40% Open

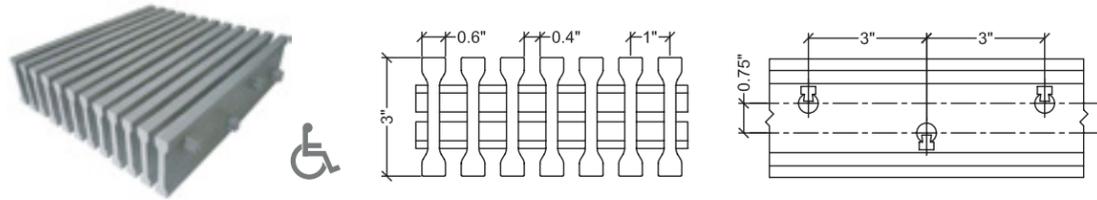


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	<0.001	<0.001	0.001	0.003	0.006	59580	12.45
18	<0.001	<0.001	<0.001	0.001	0.002	0.003	0.006	0.012	39720	19.96
24	<0.001	0.001	0.002	0.002	0.003	0.005	0.011	0.021	29790	26.81
30	<0.001	0.002	0.003	0.003	0.004	0.009	0.017	0.034	23832	32.86
36	0.001	0.003	0.004	0.005	0.006	0.013	0.026	0.051	19860	37.90
42	0.002	0.004	0.006	0.007	0.009	0.018	0.037	0.073	17023	42.09
48	0.003	0.005	0.008	0.010	0.013	0.025	0.051	0.101	14895	45.51
54	0.003	0.007	0.010	0.014	0.017	0.034	0.068	0.136	13240	48.27
60	0.004	0.009	0.013	0.018	0.022	0.045	0.090	0.179	11916	50.22
66	0.006	0.012	0.017	0.023	0.029	0.058	0.116	0.232	10833	51.62
72	0.007	0.015	0.022	0.030	0.037	0.074	0.148	0.296	9930	52.62

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	<0.001	<0.001	0.001	0.002	0.004	76262	12.45
18	<0.001	<0.001	<0.001	0.001	0.001	0.003	0.006	0.011	33894	19.96
24	<0.001	0.001	0.002	0.003	0.003	0.007	0.013	0.027	19066	26.81
30	0.001	0.003	0.004	0.005	0.005	0.007	0.013	0.027	12202	32.86
36	0.002	0.005	0.007	0.010	0.012	0.024	0.048	0.096	8474	37.9
42	0.004	0.008	0.012	0.016	0.020	0.040	0.080	0.160	6226	42.09
48	0.006	0.013	0.019	0.025	0.032	0.063	0.127	0.253	4766	45.51
54	0.010	0.019	0.029	0.038	0.048	0.096	0.191	0.382	3766	48.27
60	0.014	0.028	0.042	0.056	0.070	0.140	0.280	0.560	3050	50.22
66	0.020	0.040	0.060	0.080	0.100	0.199	0.399		2521	51.62
72	0.028	0.055	0.083	0.111	0.139	0.277	0.554		2118	52.62

Properties Per Foot of Width			# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 14.44 in ²	I = 13.76 in ⁴	S = 9.18 in ³	12	3"	1"	12.28

I 30-50
I Bearing Bar
 3" Thick
 50% Open

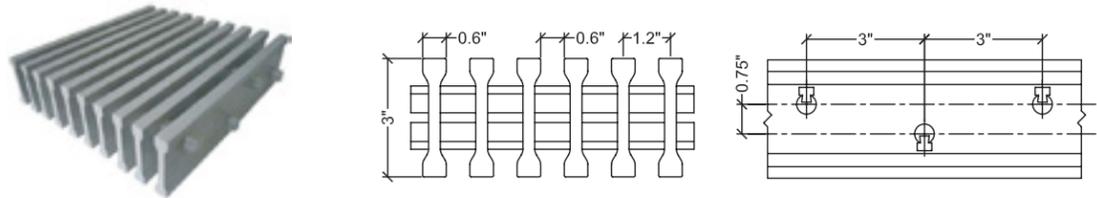


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	<0.001	0.001	0.002	0.004	0.008	46720	8.56
18	<0.001	<0.001	0.001	0.002	0.002	0.004	0.008	0.016	31147	15.02
24	<0.001	0.001	0.002	0.003	0.003	0.007	0.014	0.027	23360	21.12
30	0.001	0.002	0.003	0.004	0.005	0.010	0.021	0.042	18688	26.84
36	0.002	0.003	0.005	0.006	0.008	0.015	0.030	0.060	15573	32.25
42	0.002	0.004	0.006	0.008	0.011	0.021	0.042	0.084	13349	36.75
48	0.003	0.006	0.009	0.011	0.014	0.029	0.057	0.115	11680	40.14
54	0.004	0.008	0.011	0.015	0.019	0.038	0.076	0.153	10382	43.00
60	0.005	0.010	0.015	0.020	0.025	0.050	0.100	0.201	9344	44.86
66	0.007	0.013	0.020	0.026	0.033	0.065	0.130	0.260	8495	46.00
72	0.008	0.017	0.025	0.033	0.041	0.083	0.165	0.331	7787	47.00

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	<0.001	<0.001	0.001	0.003	0.005	59802	8.56
18	<0.001	<0.001	0.001	0.002	0.002	0.004	0.008	0.015	26578	15.02
24	<0.001	0.002	0.003	0.003	0.004	0.009	0.017	0.034	14950	21.12
30	0.002	0.003	0.005	0.007	0.008	0.016	0.033	0.065	9568	26.84
36	0.003	0.006	0.008	0.011	0.014	0.028	0.057	0.113	6645	32.25
42	0.005	0.009	0.014	0.018	0.023	0.046	0.092	0.184	4882	36.75
48	0.007	0.014	0.022	0.029	0.036	0.072	0.143	0.287	3738	40.14
54	0.011	0.021	0.032	0.043	0.054	0.107	0.215	0.429	2953	43.00
60	0.016	0.031	0.047	0.063	0.078	0.157	0.313	0.627	2392	44.86
66	0.022	0.045	0.067	0.090	0.112	0.224	0.448		1977	46.00
72	0.031	0.062	0.093	0.124	0.155	0.310	0.620		1661	47.00

Properties Per Foot of Width			# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 12.04 in ²	I = 11.47 in ⁴	S = 7.65 in ³	10	3"	1.2"	10.34

I 30-60
I Bearing Bar
 3" Thick
 60% Open

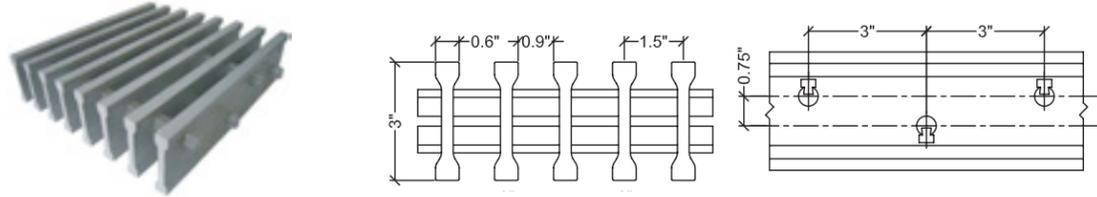

Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	0.001	0.001	0.003	0.005	0.011	34635	6.85
18	<0.001	0.001	0.002	0.002	0.003	0.005	0.010	0.021	23090	11.68
24	<0.001	0.002	0.003	0.003	0.004	0.009	0.017	0.035	17318	16.68
30	0.001	0.003	0.004	0.005	0.007	0.014	0.027	0.054	13854	20.78
36	0.002	0.004	0.006	0.008	0.010	0.019	0.039	0.077	11545	25.24
42	0.003	0.005	0.008	0.010	0.013	0.026	0.052	0.105	9896	29.42
48	0.004	0.007	0.011	0.014	0.018	0.035	0.070	0.141	8659	32.70
54	0.005	0.009	0.014	0.019	0.023	0.047	0.094	0.187	7697	35.00
60	0.006	0.012	0.019	0.025	0.031	0.062	0.124	0.248	6927	36.30
66	0.008	0.016	0.024	0.032	0.040	0.080	0.160	0.320	6297	37.40
72	0.010	0.020	0.030	0.041	0.051	0.102	0.203	0.406	5773	38.30

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	<0.001	<0.001	0.002	0.003	0.007	44333	6.85
18	<0.001	0.001	0.001	0.002	0.002	0.005	0.010	0.020	19703	11.68
24	0.001	0.002	0.003	0.004	0.005	0.011	0.022	0.043	11083	16.68
30	0.002	0.004	0.006	0.008	0.011	0.021	0.042	0.085	7093	20.78
36	0.004	0.007	0.011	0.014	0.018	0.036	0.072	0.144	4926	25.24
42	0.006	0.011	0.017	0.023	0.029	0.057	0.115	0.230	3619	29.42
48	0.009	0.018	0.026	0.035	0.044	0.088	0.176	0.352	2771	32.70
54	0.013	0.026	0.040	0.053	0.066	0.132	0.264	0.527	2189	35.00
60	0.019	0.039	0.058	0.077	0.097	0.194	0.387		1773	36.30
66	0.028	0.055	0.083	0.110	0.138	0.275	0.551		1466	37.40
72	0.038	0.076	0.114	0.152	0.190	0.381			1231	38.30

Properties Per Foot of Width			# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 9.63 in ²	I = 9.18 in ⁴	S = 6.12 in ³	8	3"	1.5"	8.40



PROGrate® Heavy Duty Pultruded Grating (HDP)



PROGrate® Heavy Duty Pultruded (HDP) grating is engineered to carry higher loads than traditional grating. It also delivers the same high-strength, corrosion-resistant performance as our PROGrate® pultruded grating products. Our HDP grating is available in 1", 1.5", 2" and 2.5" thicknesses and comes in IFR and VFR resin systems in standard gray. Made-to-order panels are available up to 5' wide by 20' long.

Standard Resin Systems

PROGrate® HDP grating is available in two standard resin systems, each providing different levels of corrosion protection. Both resin systems meet Class 1 Flame Spread Rating per ASTM E-84 test standards.

IFR: A premium-grade isophthalic polyester resin system that provides excellent corrosion protection.

VFR: A vinyl ester resin system that provides the highest level of corrosion protection.

APPLICATIONS

- Flooring, platforms and ramps
- Storage areas
- Assembly lines
- Long-span walkways
- Trench covers with vehicular traffic

FEATURES

- High strength
- Corrosion resistant
- Low conductivity
- Fire retardant
- Low maintenance

Allowable Spans for Vehicular Loads

	Wheel Load (lb) (1/2 Axle Load + 30% impact)	Load Distribution Parallel to Axle (in)	Allowable Span in Inches								
			HDP 1540	HDP 1550	HDP 1560	HDP 2040	HDP 2050	HDP 2060	HDP 2540	HDP 2550	HDP 2560
AASHTO Standard Truck¹ 32,000 lb Axle Load - Dual Wheels (*formerly AASHTO H-20)	20,800	20	17	14	12	23	22	20	29	27	26
Automobile Traffic 5,000 lb Vehicle - 1,500 lb Load 55% Drive Axle Load	2,220	8	28	27	26	37	36	35	47	45	43
5 Ton Capacity Forklift 14,400 lb Vehicle - 24,400 lb Total Load 85% Drive Axle Load	13,480	11	15	14	12	22	22	20	28	27	25
3 Ton Capacity Forklift 9,800 lb Vehicle - 15,800 lb Total Load 85% Drive Axle Load	8,730	7	16	14	12	23	22	21	28	27	26
1 Ton Capacity Forklift 4,200 lb Vehicle - 6,200 lb Total Load 85% Drive Axle Load	3,425	4	20	20	19	27	27	25	34	34	32


Allowable Spans for Vehicular Loads NOTES :

1. Load is carried by the grating load bars immediately under wheel + two additional load bars.
2. Allowable span is based on allowable bending stress and 0.25" deflection; other criteria may be required by certain construction codes. Check code requirements to determine design criteria.
3. ALLOWABLE SPAN IS STRONGLY DEPENDENT ON WHEEL WIDTH AND VEHICLE LOAD CAPACITY. If your application varies from the values shown on this table, contact us for assistance.
4. Load based on AASHTO LRFD bridge design Specification, 2 Ed. This does not imply that the allowable span meets the deflection requirements of this specification.




PROGrate® Heavy Duty Pultruded Grating Load and Deflection Data

CONCENTRATED LOAD

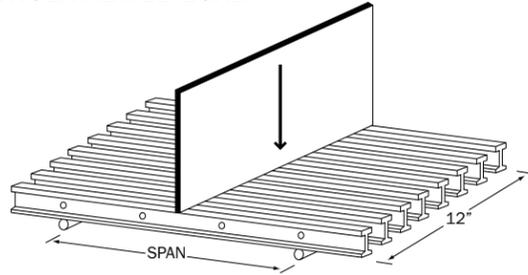


1. These tables were developed in accordance with the test method developed by the Fiberglass Grating Manufacturers Council (FGMC) of the American Composites Manufacturers Association (ACMA) for the Fiberglass Grating Standard.
2. The designer should not exceed MAXIMUM RECOMMENDED load at any time. MAXIMUM LOAD represents a 2:1 factor of safety on ULTIMATE CAPACITY. ULTIMATE CAPACITY represents MAX LOAD observed at initial fracture.
3. Walking loads for maintenance traffic are typically a live load of 50 PSF. Deflections for worker comfort are typically limited to 0.375" (3/8") or SPAN divided by 120 under full live load. For a firmer feel under full live load or a line load 250 lbs/ft of width, limit deflections to 0.25" (1/4") or SPAN divided by 200.
4. The loads represented are for STATIC LOAD CONDITIONS at ambient temperature. Deflections for impact loads or dynamic loads will MULTIPLY the deflections shown by 2. Long term loads will result in added deflection due to creep in the material and will require higher factors of safety to ensure acceptable performance.
5. Deflections are limited to 0.5" (1/2") as recommended by the Fiberglass Grating Manufacturers Council of the American Composites Manufacturers Association.

UNIFORM LOAD

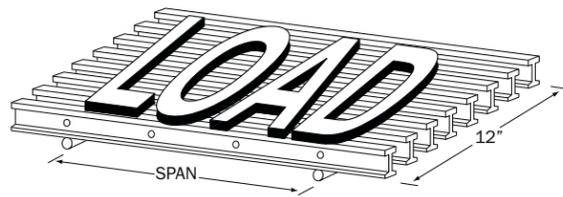

HD 10-40 HD Bearing Bar 1" Thick 40% Open




Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.002	0.003	0.005	0.007	0.008	0.017	0.034	0.068	11275	1.06
18	0.003	0.007	0.010	0.013	0.016	0.033	0.065	0.130	7517	1.87
24	0.006	0.012	0.018	0.024	0.030	0.059	0.118	0.236	5637	2.44
30	0.010	0.020	0.030	0.040	0.050	0.101	0.201	0.403	4510	2.79
36	0.016	0.033	0.049	0.065	0.081	0.163	0.326	0.652	3758	2.98
42	0.025	0.050	0.075	0.100	0.125	0.249	0.498		3221	3.10
48	0.037	0.073	0.110	0.146	0.183	0.366			2819	3.15
54	0.052	0.103	0.155	0.206	0.258	0.516			2506	3.18
60	0.070	0.141	0.211	0.281	0.352				2255	3.20

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.002	0.003	0.004	0.005	0.011	0.021	0.042	9020	1.06
18	0.003	0.006	0.009	0.012	0.015	0.030	0.061	0.122	6013	1.87
24	0.007	0.015	0.022	0.030	0.037	0.074	0.148	0.295	4510	2.44
30	0.016	0.031	0.047	0.063	0.079	0.157	0.315	0.629	3608	2.79
36	0.031	0.061	0.092	0.122	0.153	0.306	0.611		2506	2.98
42	0.054	0.109	0.163	0.218	0.272	0.545			1841	3.10
48	0.091	0.183	0.274	0.366	0.457				1409	3.15
54	0.145	0.290	0.435	0.580					1114	3.18
60	0.220	0.439	0.659						902	3.20

Properties Per Foot of Width			# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 7.20 in ²	I = 0.60 in ⁴	S = 1.20 in ³	12	1"	1"	5.84

HD 10-50 HD Bearing Bar 1" Thick 50% Open




Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.002	0.004	0.006	0.008	0.010	0.020	0.040	0.080	9318	0.90
18	0.004	0.007	0.011	0.014	0.018	0.036	0.072	0.144	6216	1.69
24	0.007	0.013	0.020	0.026	0.033	0.066	0.132	0.264	4659	2.18
30	0.012	0.023	0.035	0.046	0.058	0.116	0.232	0.465	3727	2.42
36	0.019	0.038	0.057	0.076	0.095	0.190	0.380		3106	2.56
42	0.030	0.059	0.089	0.119	0.148	0.297	0.594		2662	2.60
48	0.044	0.088	0.131	0.175	0.219	0.438			2330	2.63
54	0.062	0.124	0.186	0.248	0.309	0.619			2071	2.65
60	0.084	0.169	0.253	0.337	0.421				1864	2.67

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.002	0.004	0.005	0.006	0.012	0.025	0.050	7455	0.90
18	0.003	0.007	0.010	0.013	0.017	0.034	0.067	0.135	4970	1.69
24	0.008	0.017	0.025	0.033	0.041	0.083	0.165	0.330	3727	2.18
30	0.018	0.036	0.054	0.073	0.091	0.182	0.363		2982	2.42
36	0.038	0.076	0.107	0.142	0.178	0.356			2071	2.56
42	0.065	0.130	0.195	0.260	0.325	0.649			1521	2.60
48	0.109	0.219	0.328	0.438	0.547				1165	2.63
54	0.174	0.348	0.522	0.696					920	2.65
60	0.263	0.527							745	2.67

Properties Per Foot of Width			# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 6.00 in ²	I = 0.50 in ⁴	S = 1.00 in ³	10	1"	1.2"	4.94

HD 10-60 HD Bearing Bar 1" Thick 60% Open



Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.003	0.005	0.008	0.010	0.013	0.025	0.050	0.100	7548	0.72
18	0.004	0.009	0.013	0.017	0.021	0.043	0.086	0.171	5032	1.42
24	0.008	0.016	0.024	0.032	0.040	0.079	0.158	0.316	3774	1.82
30	0.014	0.028	0.043	0.057	0.071	0.142	0.284	0.568	3019	1.98
36	0.023	0.046	0.069	0.093	0.116	0.231	0.463		2516	2.10
42	0.036	0.072	0.108	0.144	0.180	0.361			2156	2.14
48	0.053	0.107	0.160	0.213	0.267	0.533			1887	2.16
54	0.075	0.150	0.225	0.300	0.374				1677	2.19
60	0.102	0.205	0.307	0.409	0.511				1510	2.20

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.002	0.003	0.005	0.006	0.008	0.016	0.031	0.062	6037	0.72
18	0.004	0.008	0.012	0.016	0.020	0.040	0.080	0.160	4025	1.42
24	0.010	0.020	0.030	0.040	0.049	0.099	0.198	0.396	3018	1.82
30	0.022	0.044	0.067	0.089	0.111	0.222	0.444		2415	1.98
36	0.043	0.087	0.130	0.174	0.217	0.434			1677	2.10
42	0.079	0.158	0.237	0.316	0.394				1232	2.14
48	0.133	0.267	0.400	0.533	0.667				943	2.16
54	0.211	0.421	0.632						745	2.19
60	0.320	0.639							604	2.20

Properties Per Foot of Width			# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 4.80 in ²	I = 0.40 in ⁴	S = 0.80 in ³	8	1"	1.5"	4.05

HD 15-40 HD Bearing Bar 1.5" Thick 40% Open




Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	0.001	0.001	0.002	0.003	0.007	0.013	25696	5.40
18	<0.001	0.001	0.002	0.003	0.003	0.007	0.014	0.027	17130	8.84
24	0.001	0.003	0.004	0.005	0.007	0.014	0.027	0.055	12848	10.56
30	0.003	0.005	0.008	0.010	0.013	0.025	0.050	0.101	10278	11.17
36	0.004	0.008	0.013	0.017	0.021	0.042	0.084	0.168	8565	11.55
42	0.007	0.013	0.020	0.026	0.033	0.066	0.131	0.262	7342	11.78
48	0.010	0.019	0.029	0.038	0.048	0.095	0.191	0.381	6424	12.09
54	0.013	0.027	0.040	0.054	0.067	0.134	0.268	0.536	5710	12.25
60	0.018	0.036	0.054	0.072	0.090	0.181	0.362		5139	12.43
66	0.024	0.048	0.072	0.096	0.120	0.240	0.480		4672	12.49
72	0.031	0.062	0.093	0.124	0.155	0.311	0.621		4283	12.52

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	<0.001	0.001	0.002	0.004	0.008	29744	5.40
18	<0.001	0.001	0.002	0.003	0.003	0.006	0.013	0.026	19830	8.84
24	0.002	0.003	0.005	0.007	0.009	0.017	0.034	0.068	14872	10.56
30	0.004	0.008	0.012	0.016	0.020	0.039	0.079	0.157	11898	11.17
36	0.008	0.016	0.024	0.032	0.039	0.079	0.158	0.316	8362	11.55
42	0.014	0.029	0.043	0.057	0.072	0.143	0.287	0.573	6070	11.78
48	0.024	0.048	0.071	0.095	0.119	0.238	0.477		4648	12.09
54	0.038	0.075	0.113	0.151	0.188	0.377			3672	12.25
60	0.057	0.113	0.170	0.226	0.283	0.565			2974	12.43
66	0.082	0.165	0.247	0.330	0.412				2458	12.49
72	0.116	0.233	0.349	0.466	0.582				2066	12.52

Properties Per Foot of Width			# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 10.80 in ²	I = 2.03 in ⁴	S = 2.71 in ³	12	1.5"	1"	9.13

**HD 15-50
HD Bearing Bar**
1.5" Thick
50% Open




Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	0.001	0.002	0.002	0.003	0.006	0.011	0.022	21776	3.27
18	<0.001	0.002	0.003	0.003	0.004	0.009	0.017	0.035	14517	6.94
24	0.002	0.003	0.005	0.007	0.008	0.017	0.033	0.066	10888	8.71
30	0.003	0.006	0.009	0.012	0.015	0.031	0.061	0.122	8710	9.22
36	0.005	0.010	0.015	0.020	0.025	0.051	0.102	0.204	7259	9.53
42	0.008	0.016	0.024	0.032	0.040	0.079	0.159	0.318	6222	9.72
48	0.012	0.023	0.035	0.046	0.058	0.116	0.231	0.462	5444	9.97
54	0.016	0.032	0.049	0.065	0.081	0.162	0.325	0.649	4839	10.11
60	0.022	0.044	0.066	0.088	0.110	0.219	0.439		4355	10.26
66	0.029	0.058	0.087	0.116	0.145	0.291	0.581		3959	10.30
72	0.038	0.075	0.113	0.151	0.188	0.376			3629	10.33

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	0.001	0.001	0.002	0.003	0.007	0.014	23452	3.27
18	<0.001	0.002	0.002	0.003	0.004	0.008	0.016	0.033	15635	6.94
24	0.002	0.004	0.006	0.008	0.010	0.021	0.041	0.083	11726	8.71
30	0.005	0.010	0.014	0.019	0.024	0.048	0.095	0.191	9381	9.22
36	0.010	0.019	0.029	0.038	0.048	0.096	0.191	0.382	6514	9.53
42	0.017	0.035	0.052	0.069	0.087	0.174	0.347	0.695	4786	9.72
48	0.029	0.058	0.087	0.115	0.144	0.289	0.577		3664	9.97
54	0.046	0.091	0.137	0.183	0.228	0.456			2895	10.11
60	0.069	0.137	0.206	0.274	0.343	0.685			2345	10.26
66	0.100	0.200	0.300	0.400	0.499				1938	10.30
72	0.141	0.282	0.424	0.565					1629	10.33

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 9.00 in ² I = 1.60 in ⁴ S = 2.25 in ³	10	1.5"	1.2"	7.69

**HD 20-40
HD Bearing Bar**
2" Thick
40% Open

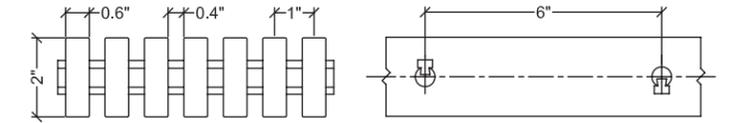


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	0.001	0.001	0.003	0.005	0.010	48090	6.92
18	<0.001	<0.001	0.001	0.002	0.002	0.005	0.009	0.019	32060	12.80
24	<0.001	0.002	0.003	0.003	0.004	0.009	0.017	0.034	24045	16.80
30	0.001	0.003	0.004	0.006	0.007	0.014	0.029	0.058	19236	19.50
36	0.002	0.005	0.007	0.009	0.011	0.023	0.045	0.090	16030	21.60
42	0.003	0.007	0.010	0.013	0.017	0.034	0.067	0.134	13740	23.00
48	0.005	0.010	0.014	0.019	0.024	0.048	0.096	0.193	12023	23.90
54	0.007	0.013	0.020	0.027	0.034	0.067	0.135	0.270	10687	24.34
60	0.009	0.018	0.027	0.036	0.046	0.091	0.182	0.365	9618	24.69
66	0.012	0.024	0.036	0.048	0.060	0.120	0.240	0.479	8744	25.00
72	0.015	0.031	0.046	0.061	0.077	0.154	0.307	0.614	8015	25.33
78	0.019	0.039	0.058	0.078	0.097	0.195	0.389		7398	25.40
84	0.024	0.048	0.072	0.096	0.121	0.241	0.482		6870	25.60

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	<0.001	<0.001	0.002	0.003	0.007	24623	6.92
18	<0.001	<0.001	0.001	0.002	0.002	0.004	0.009	0.018	16415	12.80
24	0.001	0.002	0.003	0.004	0.005	0.011	0.021	0.043	12311	16.80
30	0.002	0.005	0.007	0.009	0.011	0.023	0.045	0.090	9849	19.50
36	0.004	0.008	0.013	0.017	0.021	0.042	0.084	0.169	6840	21.60
42	0.007	0.015	0.022	0.029	0.037	0.073	0.147	0.294	5025	23.00
48	0.012	0.024	0.036	0.048	0.060	0.120	0.241	0.482	3847	23.90
54	0.019	0.038	0.057	0.076	0.095	0.189	0.379		3040	24.34
60	0.028	0.057	0.085	0.114	0.142	0.285	0.570		2462	24.69
66	0.041	0.082	0.124	0.165	0.206	0.412			2035	25.00
72	0.058	0.115	0.173	0.230	0.288	0.576			1710	25.33
78	0.079	0.158	0.237	0.316	0.395				1457	25.40
84	0.106	0.211	0.317	0.422	0.528				1256	25.60

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 14.4 in ² I = 4.80 in ⁴ S = 4.80 in ³	12	2"	1"	11.81

**HD 15-60
HD Bearing Bar**
1.5" Thick
60% Open




Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	0.002	0.002	0.003	0.004	0.008	0.015	0.030	17720	2.40
18	0.001	0.002	0.003	0.004	0.006	0.011	0.022	0.044	11813	5.50
24	0.002	0.004	0.006	0.008	0.010	0.021	0.042	0.083	8860	6.90
30	0.004	0.008	0.012	0.015	0.019	0.039	0.077	0.154	7088	7.30
36	0.006	0.013	0.019	0.026	0.032	0.064	0.129	0.257	5907	7.55
42	0.010	0.020	0.030	0.040	0.050	0.100	0.200	0.401	5063	7.70
48	0.015	0.029	0.044	0.058	0.073	0.146	0.292	0.583	4430	7.90
54	0.020	0.041	0.061	0.082	0.102	0.205	0.410		3938	8.01
60	0.028	0.055	0.083	0.111	0.138	0.277	0.554		3544	8.13
66	0.037	0.073	0.110	0.147	0.183	0.367			3222	8.16
72	0.048	0.095	0.143	0.190	0.238	0.475			2953	8.18

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	0.001	0.002	0.002	0.005	0.009	0.019	18763	2.40
18	0.001	0.002	0.003	0.004	0.005	0.010	0.021	0.041	12509	5.50
24	0.003	0.005	0.008	0.010	0.013	0.026	0.052	0.104	9382	6.90
30	0.006	0.012	0.018	0.024	0.030	0.060	0.120	0.241	7505	7.30
36	0.012	0.024	0.036	0.048	0.060	0.121	0.241	0.483	5212	7.55
42	0.022	0.044	0.066	0.088	0.110	0.219	0.438		3829	7.70
48	0.036	0.073	0.109	0.146	0.182	0.365			2932	7.90
54	0.058	0.115	0.173	0.230	0.288	0.576			2317	8.01
60	0.087	0.173	0.260	0.346	0.433				1878	8.13
66	0.126	0.252	0.378	0.504	0.631				1551	8.16
72	0.178	0.356	0.535	0.713					1303	8.18

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 7.20 in ² I = 1.36 in ⁴ S = 1.81 in ³	8	1.5"	1.5"	6.25


**HD 20-50
HD Bearing Bar**
2" Thick
50% Open

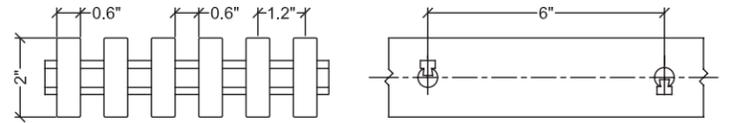

Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	0.001	0.001	0.002	0.004	0.007	0.014	43449	5.14
18	<0.001	0.001	0.002	0.003	0.003	0.007	0.013	0.027	28966	9.10
24	0.001	0.002	0.003	0.004	0.006	0.011	0.022	0.045	21725	12.90
30	0.002	0.003	0.005	0.007	0.009	0.017	0.035	0.069	17380	16.20
36	0.003	0.005	0.008	0.010	0.013	0.026	0.052	0.103	14483	18.83
42	0.004	0.008	0.012	0.015	0.019	0.038	0.077	0.154	12414	20.10
48	0.006	0.011	0.017	0.022	0.028	0.056	0.111	0.223	10862	20.67
54	0.008	0.016	0.024	0.032	0.039	0.079	0.158	0.315	9655	20.80
60	0.011	0.021	0.032	0.043	0.054	0.107	0.214	0.428	8690	21.02
66	0.014	0.028	0.043	0.057	0.071	0.142	0.284	0.569	7900	21.06
72	0.018	0.037	0.055	0.074	0.092	0.184	0.368		7142	21.12
78	0.023	0.047	0.070	0.093	0.117	0.233	0.466		6684	21.20
84	0.029	0.058	0.087	0.116	0.145	0.290	0.580		6207	21.30

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	<0.001	0.001	0.002	0.004	0.009	22248	5.14
18	<0.001	0.001	0.002	0.003	0.003	0.006	0.013	0.025		

**HD 20-60
HD Bearing Bar**
2" Thick
60% Open

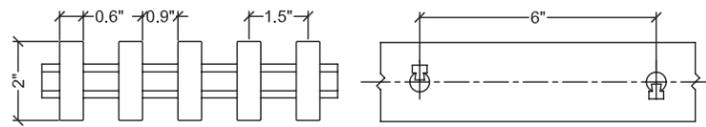


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	0.001	0.002	0.002	0.003	0.005	0.010	0.020	37380	3.56
18	<0.001	0.001	0.002	0.003	0.004	0.007	0.015	0.029	24920	8.30
24	0.001	0.002	0.004	0.005	0.006	0.012	0.023	0.047	18690	12.30
30	0.002	0.004	0.006	0.008	0.010	0.019	0.038	0.077	14952	14.70
36	0.003	0.006	0.009	0.012	0.015	0.030	0.060	0.119	12460	16.30
42	0.005	0.009	0.014	0.018	0.023	0.045	0.090	0.181	10680	17.10
48	0.007	0.013	0.020	0.026	0.033	0.065	0.131	0.262	9345	17.60
54	0.009	0.019	0.028	0.037	0.046	0.093	0.185	0.371	8307	17.70
60	0.013	0.025	0.038	0.051	0.063	0.127	0.253	0.506	7476	17.78
66	0.017	0.033	0.050	0.067	0.084	0.167	0.335	0.670	6796	17.88
72	0.022	0.043	0.065	0.086	0.108	0.216	0.432		6230	18.02
78	0.027	0.055	0.082	0.109	0.137	0.273	0.546		5751	18.10
84	0.034	0.068	0.102	0.136	0.170	0.339	0.678		5340	18.20

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	0.001	0.001	0.002	0.005	0.010	19140	4.56
18	<0.001	0.001	0.002	0.003	0.003	0.007	0.014	0.027	12760	8.34
24	0.001	0.003	0.004	0.006	0.007	0.014	0.028	0.057	9570	12.70
30	0.003	0.006	0.009	0.012	0.015	0.030	0.060	0.120	7656	14.70
36	0.006	0.011	0.017	0.022	0.028	0.056	0.112	0.224	5317	16.30
42	0.010	0.020	0.030	0.039	0.049	0.099	0.197	0.395	3906	17.10
48	0.016	0.033	0.049	0.065	0.082	0.164	0.327	0.655	2991	17.60
54	0.026	0.052	0.078	0.104	0.130	0.261	0.521		2363	17.70
60	0.040	0.079	0.119	0.158	0.198	0.395			1914	17.78
66	0.058	0.115	0.173	0.230	0.288	0.576			1582	17.88
72	0.081	0.162	0.243	0.324	0.405				1329	18.02
78	0.111	0.222	0.333	0.444	0.555				1133	18.10
84	0.148	0.297	0.445	0.594					977	18.20

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 9.60 in ² I = 3.20 in ⁴ S = 3.20 in ³	8	2"	1.5"	8.03

**HD 25-50
HD Bearing Bar**
2.5" Thick
50% Open

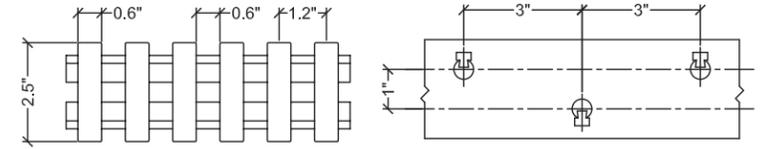


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	0.001	0.001	0.003	0.006	0.012	59525	6.02
18	<0.001	0.001	0.002	0.002	0.003	0.005	0.010	0.020	39683	12.03
24	<0.001	0.002	0.002	0.003	0.004	0.008	0.016	0.032	29763	18.20
30	0.001	0.002	0.003	0.005	0.006	0.011	0.023	0.046	23810	24.50
36	0.002	0.003	0.005	0.007	0.008	0.017	0.034	0.068	19842	28.80
42	0.002	0.005	0.007	0.010	0.012	0.025	0.049	0.099	17007	31.20
48	0.003	0.007	0.010	0.014	0.017	0.035	0.070	0.139	14881	33.10
54	0.005	0.010	0.014	0.019	0.024	0.048	0.095	0.190	13228	34.50
60	0.006	0.013	0.019	0.026	0.032	0.064	0.128	0.256	11905	35.10
66	0.008	0.017	0.025	0.034	0.042	0.084	0.168	0.336	10823	35.60
72	0.011	0.022	0.033	0.043	0.054	0.109	0.217	0.434	9921	35.80
78	0.014	0.027	0.041	0.055	0.069	0.137	0.275	0.549	9158	36.00
84	0.017	0.034	0.051	0.068	0.085	0.171	0.341	0.682	8504	36.20
90	0.021	0.042	0.063	0.083	0.104	0.209	0.417		7937	36.40
96	0.025	0.050	0.076	0.101	0.126	0.252	0.504		7441	36.60
102	0.030	0.060	0.090	0.120	0.150	0.300	0.601		7003	36.80

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	<0.001	<0.001	0.002	0.004	0.007	30480	6.02
18	<0.001	0.001	0.001	0.002	0.002	0.005	0.009	0.019	20320	12.03
24	0.001	0.002	0.003	0.004	0.005	0.010	0.020	0.040	15240	18.20
30	0.002	0.004	0.005	0.007	0.009	0.018	0.036	0.072	12192	24.50
36	0.003	0.006	0.009	0.013	0.016	0.032	0.063	0.127	8466	28.80
42	0.005	0.011	0.016	0.022	0.027	0.054	0.108	0.216	6220	31.20
48	0.009	0.017	0.026	0.035	0.044	0.087	0.174	0.348	4762	33.10
54	0.013	0.027	0.040	0.053	0.067	0.134	0.267	0.535	3763	34.50
60	0.020	0.040	0.060	0.080	0.100	0.200	0.401		3048	35.10
66	0.029	0.058	0.087	0.116	0.145	0.289	0.578		2519	35.60
72	0.041	0.081	0.122	0.163	0.204	0.407			2117	35.80
78	0.056	0.112	0.167	0.223	0.279	0.558			1803	36.00
84	0.075	0.149	0.224	0.298	0.373				1555	36.20
90	0.098	0.196	0.293	0.391	0.489				1355	36.40
96	0.126	0.252	0.378	0.504	0.629				1191	36.60
102	0.160	0.319	0.479	0.638					1055	36.80

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 15.0 in ² I = 7.81 in ⁴ S = 6.25 in ³	10	2.5"	1.2"	12.14

**HD 25-40
HD Bearing Bar**
2.5" Thick
40% Open

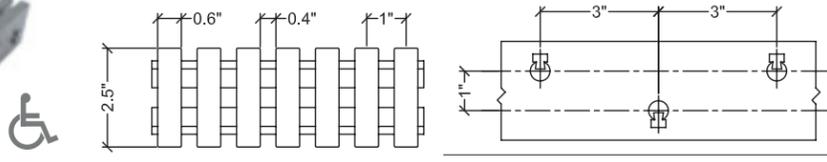

Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	<0.001	0.001	0.002	0.004	0.008	68225	8.68
18	<0.001	<0.001	0.001	0.002	0.002	0.004	0.008	0.016	45483	15.20
24	<0.001	0.001	0.002	0.003	0.003	0.007	0.014	0.027	34113	21.00
30	0.001	0.002	0.003	0.004	0.005	0.010	0.021	0.042	27292	26.80
36	0.002	0.003	0.005	0.006	0.008	0.015	0.030	0.060	22742	32.20
42	0.002	0.004	0.006	0.009	0.011	0.021	0.043	0.086	19493	35.90
48	0.003	0.006	0.009	0.012	0.015	0.030	0.060	0.120	17056	38.40
54	0.004	0.008	0.012	0.016	0.020	0.041	0.081	0.162	15161	40.50
60	0.005	0.011	0.016	0.022	0.027	0.055	0.109	0.218	13645	41.20
66	0.007	0.014	0.021	0.029	0.036	0.071	0.143	0.286	12405	41.90
72	0.009	0.018	0.027	0.037	0.046	0.091	0.183	0.365	11371	42.60
78	0.012	0.023	0.035	0.046	0.058	0.115	0.231	0.461	10496	42.85
84	0.014	0.029	0.043	0.058	0.072	0.144	0.288	0.576	9746	42.90
90	0.018	0.035	0.053	0.071	0.088	0.177	0.353		9097	42.98
96	0.021	0.043	0.064	0.086	0.107	0.214	0.428		8528	43.10
102	0.026	0.051	0.077	0.102	0.128	0.256	0.512		8026	43.20

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	<0.001	<0.001	<0.001	<0.001	0.001	0.003	0.005	34933	8.56
18	<0.001	<0.001	0.001	0.001	0.002	0.004	0.007	0.015	23288	15.20
24	<0.001	0.002	0.003	0.003	0.003	0.004	0.009	0.017	17466	21.00
30	0.002	0.003	0.005	0.007	0.008	0.016	0.033	0.066	13973	26.80
36	0.003	0.006	0.008	0.011	0.014	0.028	0.057	0.113	9704	32.20
42	0.005	0.009	0.014	0.019	0.024	0.047	0.094	0.188	7129	35.90
48	0.008	0.015	0.023	0.030	0.038	0.075	0.150	0.300	5458	38.40
54	0.011	0.023	0.034	0.046	0.057	0.114	0.228	0.456	4313	40.50
60	0.017	0.034	0.051	0.068	0.085	0.171	0.341	0.683	3493	41.20
66	0.025	0.049	0.074	0.098	0.123	0.246	0.491		2887	41.90
72	0.034	0.068	0.103	0.137	0.171	0.342	0.684		2426	42.60
78	0.047	0.094	0.141	0.187	0.234	0.469			2067	42.85
84	0.063	0.126	0.189	0.252	0.315	0.630			1782	42.90
90	0.083	0.166	0.248	0.331	0.414				1553	42.98
96	0.107	0.214	0.321	0.428	0.535				1365	43.10
102	0.136	0.272	0.408	0.544	0.680				1209	43.20

Properties Per Foot of Width	# of Bars	Load Bar Depth	Bar Centers	Weight/sq ft
A = 18.00 in ² I = 9.38 in ⁴ S = 7.50 in ³	12	2.5"	1"	14.48

**HD 25-60
HD Bearing Bar**
2.5" Thick
60% Open






»» VGBA Certified & Food Grade Products

PROGrate® pultruded FRP grating has been tested and has met the specifications set forth by the Virginia Graeme Baker Act (VGBA) for use in VGBA compliant drain systems.

An independent test laboratory has tested PROGrate® pultruded grating in accordance with ASME A112.19.8.a – 2008, section 3.2 (Ultraviolet Light Exposure), which includes ASTM D256 for izod impact and ASTM D638 for tensile strength after being subjected to accelerated UV weathering.

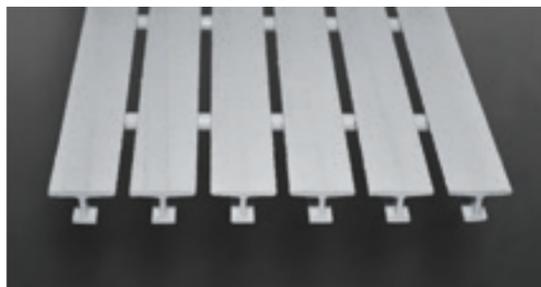

PROGrate® WT 10-18, I 10-40 and I 15-40 are ideal for fabricating VGBA-compliant drain systems around pools and spas.

Completed test results have shown that PROGrate® grating has a K factor of 1.1 when calculated from section 3.2.2.3 (Performance Requirements) of the ASME A112.19.8.a – 2008 specification, which is the test method for grating covering pool drains. All of our FRP grating products are available as stock panels or can be fabricated to size.

FOOD-GRADE APPLICATIONS

We also offer PROGrid® molded and PROGrate® pultruded grating for food processing applications. These products are manufactured using a premium food-grade polyester resin that contains no harmful ingredients and is certified by the resin manufacturer. In addition, each panel is post-cured and detergent-washed prior to shipping.

We certify that our food-grade PROGrid® molded and PROGrate® pultruded FRP grating products are acceptable for use in all food and beverage processing facilities, when properly installed and maintained as an ergonomic or anti-slip walking floor surface or covering. These products meet USDA acceptance requirements for floor surfaces.

Previously, the USDA tested all materials and products that were in any way deemed a possibility for incidental food contact in food processing facilities. Letters of Acceptance were issued for tested, approved products. According to Appendixes A and B of the National Register (Sept. 1995), the USDA has limited its scope for the testing of construction materials that were in obvious contradiction to the original ruling and no longer issues Letters of Acceptance. Floor and wall materials should at no time come in contact with food products during the manufacturing process and therefore need not be tested for intended food contact.

Our PROGrid® molded and PROGrate® pultruded products are designed to be installed only as worker ergonomic or anti-slip floor grating, and we have issued this statement as a guarantee of suitability of material for this use in food processing facilities.

»» PROGrid® Molded & PROGrate® Pultruded Phenolic Grating

PROGrid® molded and PROGrate® pultruded phenolic grating products are the ideal solution for decks, platforms, stairways and walkways that require superior resistance to fire, as well as low levels of smoke and toxic gas emissions. Our phenolic grating products are manufactured to the highest quality standards using fiberglass reinforcement and a phenolic resin system. These products are USCG level 2 approved.



APPLICATIONS

- Offshore platforms
- Marine and ocean-going vessels
- Tunnels/public transportation
- Mining
- Public buildings
- Industrial/processing plants
- Refineries

FEATURES


- High temperature and fire resistance
- Low smoke and toxic fume emissions
- Lightweight
- Low maintenance
- Easy to install




**United States Coast Guard
APPROVED**

PROGrid®/PROGrate® Phenolic Grating Load and Deflection Data

CONCENTRATED LOAD




UNIFORM LOAD

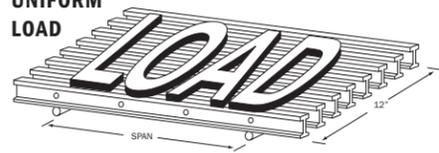

1. These tables were developed in accordance with the test method developed by the Fiberglass Grating Manufacturers Council (FGMC) of the American Composites Manufacturers Association (ACMA) for the Fiberglass Grating Standard.
2. The designer should not exceed MAXIMUM RECOMMENDED load at any time. MAXIMUM LOAD represents a factor of safety of 4:1 for PROGrid® molded grating and 2:1 for PROGrate® pultruded grating on ULTIMATE CAPACITY. ULTIMATE CAPACITY represents MAX LOAD observed at initial fracture.
3. Walking loads for maintenance traffic are typically a live load of 50 PSF. Deflections for worker comfort are typically limited to 0.375" (3/8") or SPAN divided by 120 under full live load. For a firmer feel under full live load or a line load 250 lbs/ft of width, limit deflections to 0.25" (1/4") or SPAN divided by 200.
4. The loads represented are for STATIC LOAD CONDITIONS at ambient temperature. Deflections for impact loads or dynamic loads will MULTIPLY the deflections shown by 2. Long term loads will result in added deflection due to creep in the material and will require higher factors of safety to ensure acceptable performance.
5. Deflections are limited to 0.5" (1/2") as recommended by the Fiberglass Grating Manufacturers Council of the American Composites Manufacturers Association.

PROGrid® Molded Phenolic Grating
USCG Approval #164.040/14/0
1.5" x 1.5" x 6" PH
Rectangular Grid
1.5" Thick / 55% Open

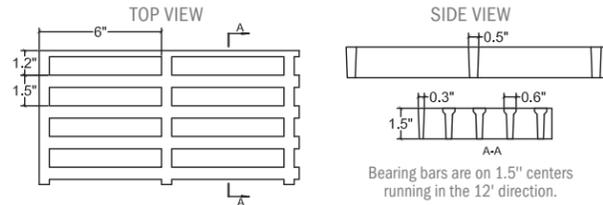


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.003	0.004	0.005	0.006	0.013	0.026	0.052	3780	1.39
18	0.003	0.006	0.010	0.013	0.016	0.032	0.065	0.130	2520	1.87
24	0.007	0.014	0.020	0.027	0.034	0.068	0.135	0.270	1890	2.13
30	0.013	0.025	0.038	0.050	0.063	0.126	0.251	0.502	1512	2.24
36	0.021	0.043	0.064	0.085	0.107	0.213	0.427		1260	2.28
42	0.033	0.066	0.100	0.133	0.166	0.332	0.664		1080	2.32
44	0.038	0.076	0.114	0.152	0.189	0.379			1031	2.34
48	0.049	0.098	0.146	0.195	0.244	0.488			945	2.36
54	0.069	0.137	0.206	0.275	0.343	0.687			840	2.39

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	<0.001	0.002	0.002	0.003	0.004	0.008	0.016	0.032	7560	1.39
18	0.003	0.006	0.009	0.012	0.015	0.030	0.061	0.122	3360	1.87
24	0.008	0.017	0.025	0.034	0.042	0.085	0.169	0.338	1890	2.13
30	0.020	0.039	0.059	0.078	0.098	0.196	0.392		1210	2.24
36	0.040	0.080	0.120	0.160	0.200	0.400			840	2.28
42	0.073	0.145	0.218	0.291	0.363				617	2.32
44	0.087	0.174	0.260	0.347	0.434				562	2.34
48	0.122	0.244	0.366	0.488	0.610				473	2.36
54	0.193	0.386	0.579						373	2.39

Properties Per Foot of Width				# of Bars	Load Bar Width	Bar Centers	Weight/sq ft
A = 4.39 in ²	I = 0.88 in ⁴	S _x = 1.30 in ³	S _y = 1.06 in ³	8	0.6"	1.5"	3.90

PROGrate® Pultruded Phenolic Grating
USCG Approval #164.040/13/0
I 15-60 PH
I Bearing Bar
1.5" Thick / 60% Open

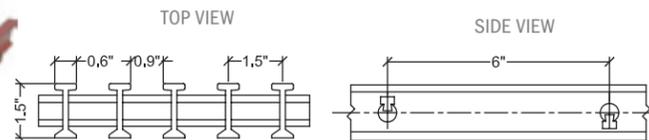


Span (inches)	CONCENTRATED LOAD in lbs/ft of width								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.002	0.003	0.004	0.005	0.010	0.020	0.040	6222	1.8
18	0.002	0.005	0.007	0.009	0.012	0.023	0.047	0.093	4148	2.6
24	0.005	0.009	0.014	0.018	0.023	0.045	0.090	0.180	3111	3.2
30	0.008	0.015	0.023	0.031	0.038	0.077	0.154	0.307	2489	3.66
36	0.012	0.024	0.036	0.048	0.060	0.121	0.242	0.484	2074	4.02
42	0.018	0.036	0.054	0.072	0.090	0.180	0.361		1778	4.28
44	0.020	0.040	0.060	0.080	0.099	0.199	0.398		1697	4.46
48	0.026	0.051	0.077	0.102	0.128	0.256	0.512		1556	4.5
54	0.036	0.073	0.109	0.145	0.181	0.363			1383	4.52

Span (inches)	UNIFORM LOAD in lbs/ft ²								Max Load	Apparent EI x 10 ⁶ (lb-in ²)
	50	100	150	200	250	500	1000	2000		
12	0.001	0.001	0.002	0.002	0.003	0.006	0.012	0.025	15555	1.8
18	0.003	0.004	0.007	0.009	0.011	0.022	0.044	0.088	6057	2.6
24	0.006	0.011	0.017	0.022	0.028	0.056	0.112	0.225	3182	3.2
30	0.012	0.024	0.036	0.048	0.060	0.120	0.240	0.480	1992	3.66
36	0.023	0.045	0.068	0.091	0.113	0.227	0.453		1393	4.02
42	0.039	0.079	0.118	0.158	0.197	0.394			1014	4.28
44	0.046	0.091	0.137	0.182	0.228	0.456			927	4.46
48	0.064	0.128	0.192	0.256	0.320	0.640			778	4.5
54	0.102	0.204	0.306	0.408	0.510				615	4.52

Properties Per Foot of Width				# of Bars	Load Bar Width	Bar Centers	Weight/sq ft
A = 3.11 in ²	I = 0.88 in ⁴	S = 1.17 in ³		8	0.6"	1.5"	3.06



PROGrid® Molded & PROGrate® Pultruded Stair Treads & Stair Tread Covers



Stair Treads

Our stair tread panels allow you to cut your own stair treads quickly and inexpensively for less waste and less cost. We stock PROGrid® molded stair treads in several sizes and configurations (see page 37). Custom-fabricated sizes are available upon request.

We can also supply PROGrate® pultruded stair tread in stock sizes (see page 38) or made to order. These maintenance-free

treads are engineered for strength, durability and corrosion resistance. Features include a non-skid surface and square tube nosing for high visibility. Our design is easy to fabricate and install on-site with basic tools.

Stair Tread Covers


FRP stair tread covers are a cost-effective option to improve stairway safety for your workers. All of our stair treads are made with corrosion-resistant, fire-retardant resin and have an anti-skid top surface.

Grating Fasteners

All grating must be fastened in place. We offer a variety of clips to complete your installation (see page 35).

Chemical Compatibility

See page 39 for a detailed table of chemical compatibility based on resin manufacturers' data including maximum allowable concentrations and temperatures.

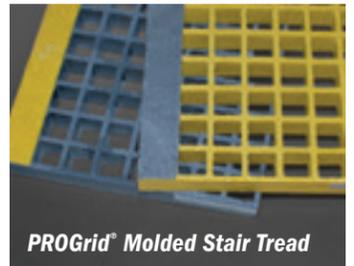

PROGrid® Molded Stair Tread




PROGrate® Pultruded Stair Tread




Stair Tread Cover


PROGrid® Molded Stair Tread

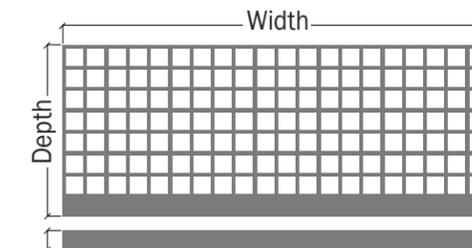


PROGrate® Pultruded Stair Tread

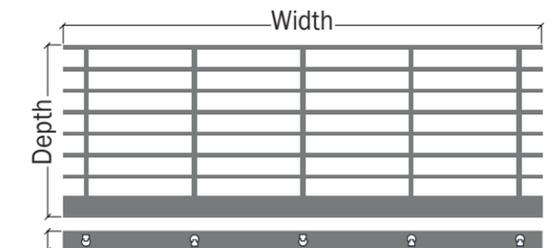


Cut your own stair tread from our stair tread panels.

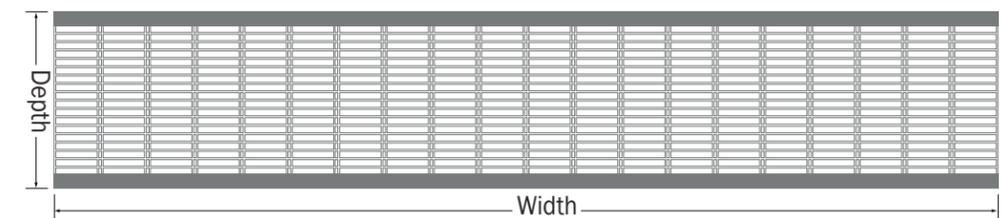

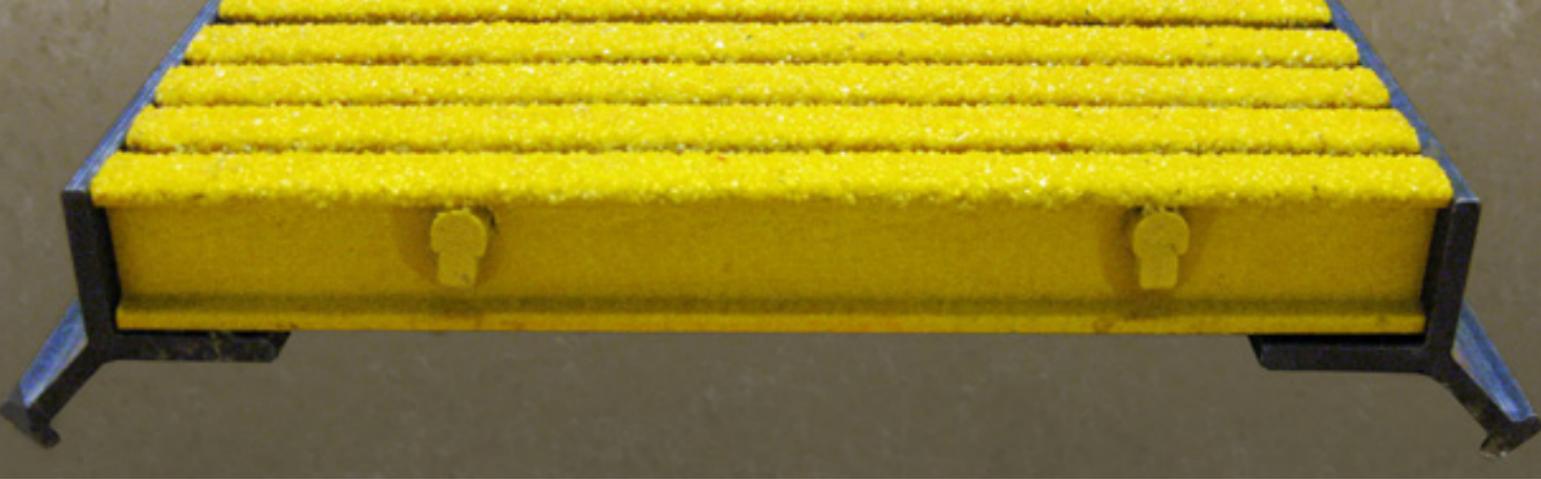



Fasteners

Several types of clips are available to secure our grating products. Normally, the maximum distance between clips should be no more than 4'. All metal clips are made of SS316 stainless steel with a thickness of 0.06" (some T clips are made from FRP). See pages 37-38 to find the clips that fit your application.





J Bolts

J bolts are used to secure grating to a support bar.




M Clips

Stainless steel hold-down M clips are used to secure panels to a support using two adjacent grating bars for a secure fit.






C Clips

C clips are used to join two ends of molded grating together. Clips should be placed every 2'-3' to meet industry requirements.




W Clips

W clips are made specifically for plate or grating with plate on top. The length of the bolt should correspond with the height of the panel.




L Clips

L clips are used to fasten grating to a support bar for moderate loads.




T Clips

T clips are used to fasten pultruded grating to a support frame.

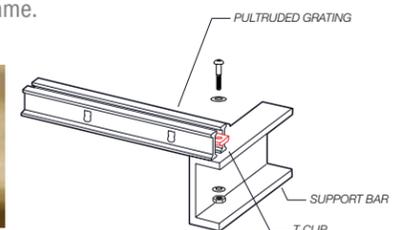


G Clips

G clips are designed to attach grating to any structural member flange, 0.75" or smaller in thickness, with no drilling required.



PROForms® Composite Embedment Angle


PROForms® FRP embedment angle is manufactured with premium-grade vinylester fire-retardant resin. It's compatible with all standard sizes of our molded and pultruded grating and has continuous anchoring incorporated into the design to eliminate the need for additional anchors. Our embedment angle is available in dark gray and is stocked in 20' lengths.

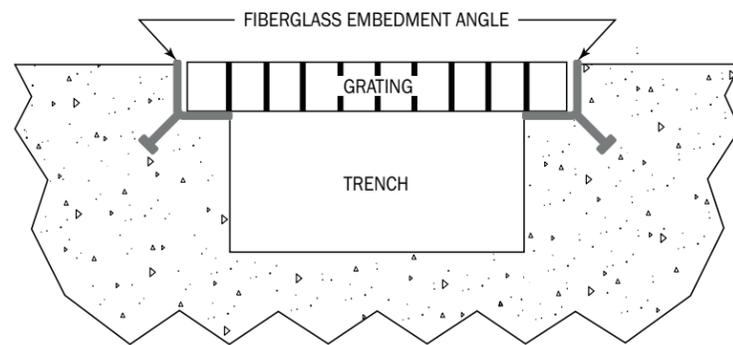


FEATURES

- Corrosion resistant
- Low conductivity
- UV stable
- Fire retardant
- High strength
- Easy to install


1" Embedment Angle




1.5" Embedment Angle



2" Embedment Angle



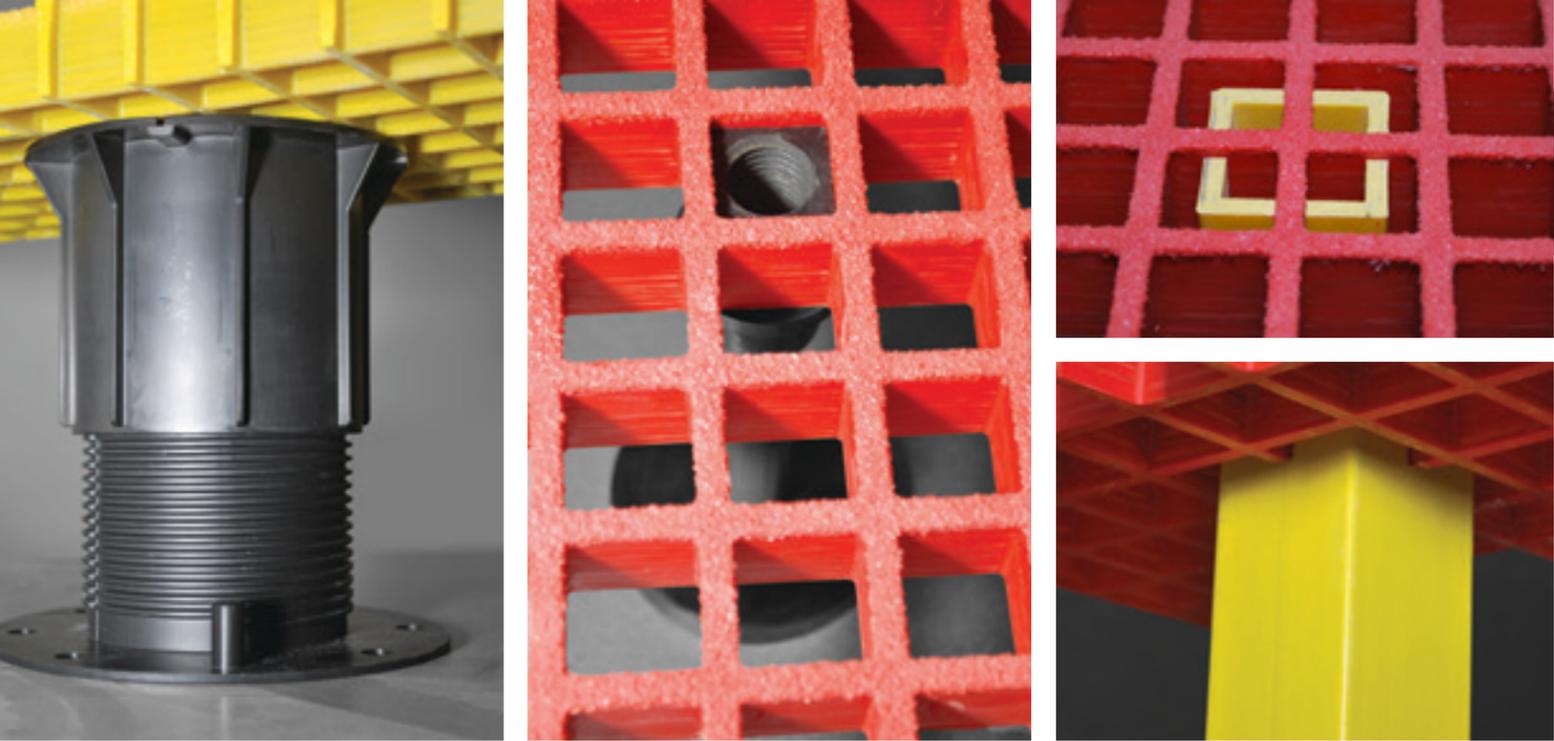

Product Availability

PROGrid® Molded Grating

Type	Depth / Thickness	Grid Pattern		Available Panel Size	Weight / Sq Ft	Open Area	Clip No.	Page
	.05"	Square	1.5" x 1.5"	4' x 12'	1.33	72%	CM-15	7
	.05"	Square	2" x 2"	4' x 12'	1.01	78%	CM-20	7
	1"	Rectangular	1" x 4"	12' x 4' *	2.61	68%	CMP-104, CL-15	6
	1"	Square	1.5" x 1.5"	3' x 10' / 4' x 8' / 4' x 12'	2.50	69%	CM-15, CL-10, CC-10, YSSGG-1C	7
	1.5"	Square	1.5" x 1.5"	3' x 10' / 4' x 8' / 4' x 12' / 5' x 10'	3.94	68%	CM-15, CL-15, CC-15, YSSGG-1C	8
ADA	1.5"	Square	0.75" x 0.75"	4' x 12'	4.75	44%	CMM-3/4	8
ADA	1.5"	Rectangular	1" x 6"	4' x 12'	4.71	38%	CMP-156, CL-15	9
	1.5"	Rectangular	1.5" x 6"	4' x 12'	4.42	55%	CM-15	9
	2"	Square	2" x 2"	4' x 12'	4.51	71%	CM-20, CC-20	8
HIGH LOAD CAPACITY								
HLC	1.5"	Rectangular	1" x 2"	4' x 6'	6.21	48%	SSGT-R	11
HLC	2"	Rectangular	1" x 2"	4' x 6'	8.4	48%	SSGT-R	11
PHENOLIC								
Phenolic	1.5"	Rectangular	1.5" x 6"	4' x 12'	3.9	55%		32

* Load Bars run in the 4' - 0" direction

PROGrid® Molded Stair Treads

Type	Depth / Thickness	Grid Pattern		Available Panel Size	Weight / Sq Ft	Open Area	Clip No.	Page
ADA	1.5"	Rectangular	1" x 6"	24" x 144"	8	38%	CMP-156, CL-15	33
	1.5"	Square	1.5" x 1.5"	12" x 144"	4	68%	CM-15, CL-15, YSSGG-1C	33
	1.5"	Square	1.5" x 1.5"	25.5" x 144"	8.5	68%	CM-15, CL-15, YSSGG-1C	33

PROGrate® Pultruded Grating


Series	Depth / Thickness	Load Bar Type / Spacing	Cross Rod Spacing	Available Panel Size	Weight / Sq Ft	Open Area	Clip No.	Page
T-BAR								
T 10-18-ADA	1"	T / 2"	6"	3' x 20' / 4' x 20'	2.39	18%	SSGT-R	14
T 10-33-ADA	1"	T / 1.5"	6"	3' x 20' / 4' x 20'	2.25	33%	SSGT-R	15
T 10-35	1"	T / 2.5"	6"	3' x 20' / 4' x 20'	2.00	35%	SSGT-R	15
T 10-50	1"	T / 2"	6"	3' x 20' / 4' x 20'	1.81	50%	SSGT-R	15
T 15-17-ADA	1.5"	T / 1.2"	6"	3' x 20' / 4' x 20'	3.39	17%	SSGT-R	16
T 15-33	1.5"	T / 1.5"	6"	3' x 20' / 4' x 20'	2.81	33%	SSGT-R	16
T 15-50	1.5"	T / 2"	6"	3' x 20' / 4' x 20'	2.23	50%	SSGT-R	16
T 20-33-ADA	2"	T / 1.5"	6"	3' x 20' / 4' x 20'	4.44	33%	CPT-20-33	17
T 20-50	2"	T / 2"	6"	3' x 20' / 4' x 20'	3.43	50%	CMP-20-50	17

Continued on next page



Grating Pedestals

Several pedestals are available for applications requiring elevated grating floor systems. Contact us for sizes and availability.

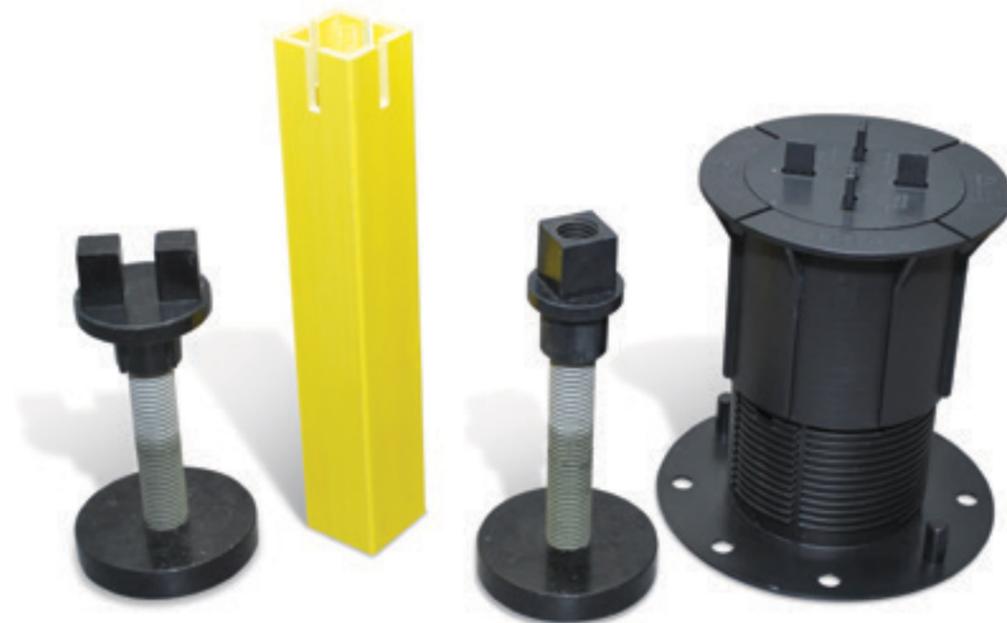

PROGrate® Pultruded Grating *Continued*

Series	Depth / Thickness	Load Bar Type / Spacing	Cross Rod Spacing	Available Panel Size	Weight / Sq Ft	Open Area	Clip No.	Page
I-BAR								
I 10-40-ADA	1"	I / 1"	6"	3' x 20' / 4' x 20'	3.47	40%	CPT-10-40	18
I 10-50	1"	I / 1.2"	6"	3' x 20' / 4' x 20'	2.97	50%	CMP-10-50	18
I 10-60	1"	I / 1.5"	6"	3' x 20' / 4' x 20'	2.47	60%	CMP-10-60, FSSGG-1C	18
I 15-40-ADA	1.5"	I / 1"	6"	3' x 20' / 4' x 20'	4.22	40%	CPT-10-40	19
I 15-50	1.5"	I / 1.2"	6"	3' x 20' / 4' x 20'	3.60	50%	CMP-15-50	19
I 15-60	1.5"	I / 1.5"	6"	3' x 20' / 4' x 20'	2.97	60%	CMP-15-60, FSSGG-1C	19
I 10-40-ADA	1"	I / .52"	6"	3' x 20' / 4' x 20'	4.08	40%	CPT-10-40	20
I 10-50-ADA	1"	I / .63"	6"	3' x 20' / 4' x 20'	3.50	50%	CMP-10-50	20
I 10-60-ADA	1"	I / .78"	6"	3' x 20' / 4' x 20'	2.92	60%	CMP-10-60	20
I 15-40-ADA	1.5"	I / .52"	6"	3' x 20' / 4' x 20'	5.32	40%	CPT-10-40	21
I 15-50-ADA	1.5"	I / .63"	6"	3' x 20' / 4' x 20'	4.64	50%	CMP-15-50	21
I 15-60-ADA	1.5"	I / .78"	6"	3' x 20' / 4' x 20'	3.74	60%	CMP-15-60	21
I 30-40-ADA	3"	I / .1"	3"	3' x 20' / 4' x 20'	12.28	40%	SSGT-R	22
I 30-50	3"	I / 1.2"	3"	3' x 20' / 4' x 20'	10.34	50%	SSGT-R	22
I 30-60	3"	I / 1.5"	3"	3' x 20' / 4' x 20'	8.40	60%	SSGT-R	22
HEAVY DUTY								
HD 10-40-ADA	1"	HD Bearing Bar / 1"	6"	3' x 20' / 4' x 20'	5.84	40%	CMP-10-50	24
HD 10-50	1"	HD Bearing Bar / 1.2"	6"	3' x 20' / 4' x 20'	4.94	50%	CMP-10-60	25
HD 10-60	1"	HD Bearing Bar / 1.5"	6"	3' x 20' / 4' x 20'	4.05	60%	CPT-10-40	25
HD 15-40-ADA	1.5"	HD Bearing Bar / 1"	6"	3' x 20' / 4' x 20'	9.13	40%	CMP-15-50	25
HD 15-50	1.5"	HD Bearing Bar / 1.2"	6"	3' x 20' / 4' x 20'	7.69	50%	CMP-15-60	26
HD 15-60	1.5"	HD Bearing Bar / 1.5"	6"	3' x 20' / 4' x 20'	6.25	60%	SSGT-R	26
HD 20-40-ADA	2"	HD Bearing Bar / 1"	6"	3' x 20' / 4' x 20'	11.81	40%	SSGT-R	27
HD 20-50	2"	HD Bearing Bar / 1.2"	6"	3' x 20' / 4' x 20'	9.92	50%	SSGT-R	27
HD 20-60	2"	HD Bearing Bar / 1.5"	6"	3' x 20' / 4' x 20'	8.03	60%	SSGT-R	28
HD 25-40-ADA	2.5"	HD Bearing Bar / 1"	3"	3' x 20' / 4' x 20'	14.48	40%	SSGT-R	28
HD 25-50	2.5"	HD Bearing Bar / 1.2"	3"	3' x 20' / 4' x 20'	12.14	50%	SSGT-R	29
HD 25-60	2.5"	HD Bearing Bar / 1.5"	3"	3' x 20' / 4' x 20'	9.81	60%	SSGT-R	29
PHENOLIC								
I 15-60-PH	1.5"	I / 1.5"	6"	3' x 20' / 4' x 20'	3.06	60%		32

PROGrate® Pultruded Stair Treads

Series	Depth / Thickness	Load Bar Type / Spacing	Cross Rod Spacing	Available Panel Size	Weight / Sq Ft	Open Area	Clip No.	Page
I-BAR								
I 10-40-ADA	1"	I / 1"	6"	12" x 144"	3.47	40%	CPT-10-40	33
I 10-50	1"	I / 1.2"	6"	12" x 144"	2.97	50%	CMP-10-50	33
I 10-60	1"	I / 1.5"	6"	12" x 144"	2.47	60%	CMP-10-60	33
I 15-40-ADA	1.5"	I / 1"	6"	12" x 144"	4.22	40%	CPT-10-40	33
I 15-50	1.5"	I / 1.2"	6"	12" x 144"	3.60	50%	CMP-15-50	33
I 15-60	1.5"	I / 1.5"	6"	12" x 144"	2.97	60%	CMP-15-60	33

Chemical Resistance Guide

Chemical Environment	% Concentration	Temp °F	PROGrid® Molded Grating			PROGrate® Pultruded Grating	
			VFR	IFR	GP	VFR	IFR
Acetic Acid	25	MAX	C	C	S	C	C
Acetic Acid	50	MAX	C	C	S	C	C
Aluminum Hydroxide	ALL	MAX	C	C	C	C	C
Ammonium Chloride	ALL	120	C	C	C	C	C
Ammonium Bicarbonate	15	120	C	C	S	C	S
Ammonium Bicarbonate	50	120	C	C	S	S	I
Ammonium Hydroxide	20	80	S	N	N	I	N
Ammonium Sulfate	ALL	120	C	C	C	C	S
Benzene	100	150	I	I	N	I	N
Benzoic Acid (SAT)	SAT	MAX	C	C	S	C	C
Borax (SAT)	SAT	MAX	C	C	S	C	S
Calcium Carbonate	ALL	MAX	C	C	S	C	C
Calcium Nitrate	ALL	MAX	C	C	C	C	C
Carbon Tetrachloride	100	80	I	N	N	I	N
Chlorine, Dry Gas*	ALL	MAX	C	C	S	C	S
Chlorine Water (SAT)	SAT	120	C	I	N	I	N
Chromic Acid	50	150	I	N	N	I	N
Citric Acid	ALL	MAX	C	C	C	C	C
Copper Chloride	ALL	MAX	C	C	C	C	C
Copper Cyanide	ALL	140	C	S	I	S	I
Copper Nitrate	ALL	MAX	C	C	C	C	C
Ethanol	10	120	C	S	S	C	S
Ethanol	50	120	C	I	I	C	I
Ethylene Glycol	ALL	ISO	C	C	S	C	S
Ferric Chloride	100	MAX	C	C	C	C	C
Ferrous Chloride	ALL	MAX	C	C	C	C	C
Formaldehyde 0-50%	50	120	S	I	I	S	I
Gasoline	ALL	120	C	C	S	C	S
Glucose	ALL	120	C	C	C	C	C
Glycerin	100	MAX	C	C	S	C	S
Hydrobromic Acid	50	MAX	S	S	I	I	N
Hydrochloric Acid	10	MAX	C	S	S	S	S
Hydrochloric Acid	37	MAX	I	S	I	I	I
Hydrogen Peroxide	30	80	C	N	N	S	N
Lactic Acid	100	MAX	C	C	C	C	C
Lithium Chloride (SAT)	SAT	MAX	N	N	N	N	N

Chemical Environment	% Concentration	Temp °F	PROGrid® Molded Grating			PROGrate® Pultruded Grating	
			VFR	IFR	GP	VFR	IFR
Magnesium Chloride	ALL	MAX	C	C	C	C	C
Magnesium Nitrate	ALL	MAX	C	C	C	C	C
Magnesium Sulfate	ALL	MAX	C	C	C	C	C
Mercuric Chloride	ALL	MAX	C	C	C	C	C
Mercurous Chloride	ALL	MAX	C	C	S	C	S
Nickel Chloride	ALL	MAX	C	C	C	C	C
Nickel Sulfate	ALL	MAX	C	C	C	C	C
Nitric Acid	20	120	S	S	I	I	I
Oxalic Acid	ALL	150	C	C	S	C	S
Perchloric Acid	30	90	S	I	I	I	I
Phosphoric Acid	80	MAX	C	C	C	C	S
Potassium Chloride	ALL	MAX	C	C	C	C	C
Potassium Dichromate	ALL	MAX	C	C	C	C	C
Potassium Nitrate	ALL	MAX	C	C	C	C	C
Potassium Sulfate	ALL	MAX	C	C	C	C	C
Propylene Glycol	ALL	MAX	C	C	S	C	S
Sodium Acetate	ALL	MAX	C	C	C	C	C
Sodium Bisulfate	ALL	80	S	S	I	C	I
Sodium Bromide	ALL	80	C	C	C	C	C
Sodium Cyanide	ALL	80	C	I	I	S	I
Sodium Hydroxide	10	MAX	C	I	N	I	N
Sodium Hydroxide	50	MAX	S	N	N	N	N
Sodium Nitrate	ALL	MAX	C	C	C	C	C
Sodium Sulfate	ALL	MAX	C	C	C	C	C
Sulfuric Acid	10	MAX	C	S	S	C	S
Sulfuric Acid	25	MAX	C	S	S	S	I
Sulfuric Acid	75	100	C	I	I	I	N
Tartaric Acid	ALL	MAX	C	C	S	C	S
Vinegar	ALL	MAX	C	C	S	C	S
Water, Distilled	ALL	MAX	C	C	C	C	C
Zinc Nitrate	100	MAX	C	C	C	C	C
Zinc Sulfate	100	MAX	C	C	C	C	C

C = Continuous exposure of the grating to the chemical environment listed at the temperature listed.

S = Frequent exposure of the grating to splashes and spills from the chemical environment listed with that environment at the temperature listed.

I = Infrequent exposure of the grating to splashes and spills from the chemical environment listed with that environment at the temperature listed and the spill immediately cleaned up or washed from the grating.

N = Not recommended for the concentrations and temperatures listed.

T = Test

MAX temperature is 185°F for molded VFR and pultruded VFR grating, 160°F for molded IFR and pultruded IFR grating, 150°F for molded GP grating.



EXPLORE OUR FULL LINE OF FRP SOLUTIONS

We also offer a wide variety of standard and custom profiles made of fiberglass-reinforced polymer – as well as a staff of skilled engineering, design and manufacturing professionals to help you maximize the benefits of FRP.

PRODUCTS

- Structural shapes
- Decking
- Handrail
- Ladders and cages
- Fabricated structures

SERVICES

- Engineering
- Design and drafting
- Fabrication, including CNC machining and assembly
- Secondary coating and painting
- In-house testing



**Environmental
Composites, Inc**

Environmental Composites | 4250 LAKE INDUSTRIAL BLVD., TAVARES, FL 32778
PHONE: 352-343-3449 | WEB: WWW.ECI1USA.COM